



GEN-4101 Microphone Panel

GEN-4101 is a microphone panel equipped with a microphone, an alarm switch, and a status indicator. It can be installed with a standard 86mm electrical box. This panel can be used in conjunction with SIPLINK series devices to enable two-way communication.

MAIN FEATURES

▲ SIPLINK series audio accessory unit

Fully compatible with SIPLINK series terminals, equipped with an omni-directional electret condenser microphone, and a momentary push button switch for initiating calls or triggering local file playback.

▲ No additional power supply required, plug and play

Equipped with a power indicator light, the microphone accessory is powered via the audio input of the SIPLINK terminal. The maximum transmission distance reaches 30 meters, plug and play, extending the call functionality of the terminal.

SPECIFICATION

Power Parameters

Phantom Power	12V DC
Current Consumption	4 mA or less (at 12 V DC)

Audio & Interface Parameters

Microphone	Omni-directional electret condenser microphone
Frequency Response	100~10KHz
Audio Output	×1 , -20dB
Control Output	×1
Indication	Green (Lit during audio input)

Mechanical & Environment Properties

Mounting Method	wall-mounted installation
Install Env	Indoor Locations
Working Temp	-10°C~+50°C
Housing Material	Aluminum alloy
Color	black
Dimensions	86*86*22mm
Weight	140g
Warranty	2 Years

ACCESSORIES

1×6pin Terminal(3.5-6P)

1 × Installation Manual


INTERFACE DESCRIPTION

[Front Panel]




- ① Indication
- ② Microphone
- ③ Button

[Rear Panel]

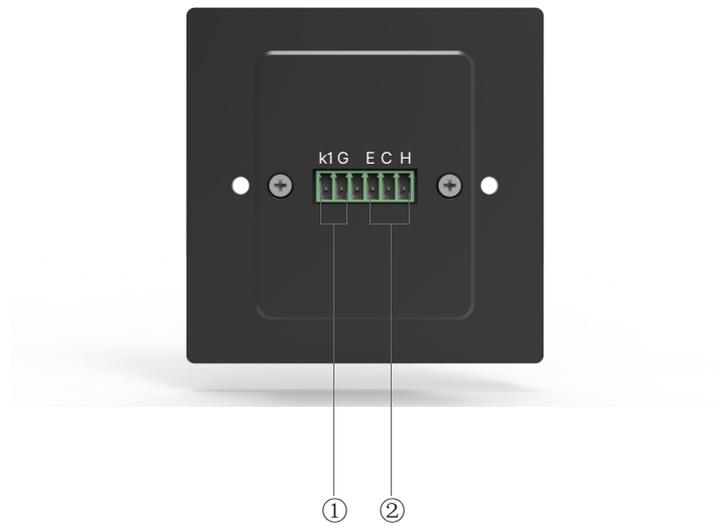

- ① Control output
- ② Audio output

CONNECTION DIAGRAM

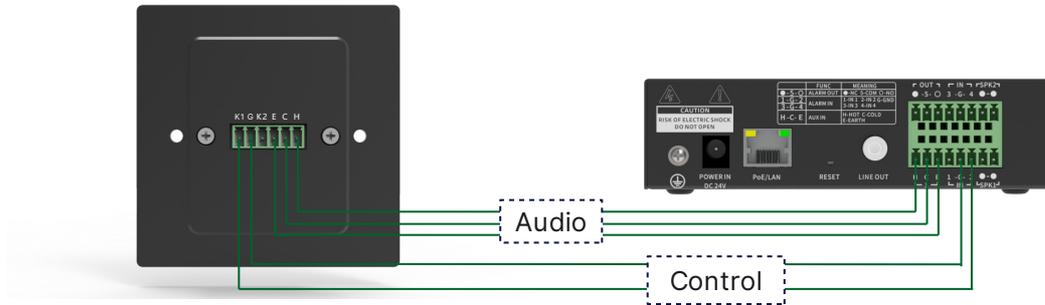

INSTALLATION

