



## LCM-6013CV-L

Digital Conference Chairman Unit

4.3-Inch  
Touch Screen

Supports Speech,  
Sign-in, Voting

Adjustable  
Gain, EQ, AGC

Speech List  
Management

Representative  
Speech Management

## MAIN FEATURES

### ▲ Display And Controls

- High-Resolution Display: 4.3 inch full-color TFT display with a resolution of 480\*480 for clear and vibrant visuals during presentations and information display.
- Multifunctional Touch Buttons: Equipped with three capacitive touch buttons capable of various functions:Initiate meeting sign-ins and voting on agendas. Real-time display of sign-in and voting results for enhanced engagement.
- Chairman Authority: The chairman unit holds the authority to approve or prohibit representatives from speaking, ensuring smooth meeting moderation and control.

### ▲ Audio Features

- High-Quality Microphone: Super-cardioid capacitive microphone head delivers clear and focused audio capture, ideal for effective communication in meetings.
- Digital Signal Transmission: Fully digital signal transmission provides strong anti-interference capability, ensuring uninterrupted and clear communication during meetings.
- Speech Status Indicator: Microphone stem features a speech status indicator light that glows red when active, providing visual feedback to speakers and improving communication clarity.

### ▲ Connectivity And Functionality

- Robust Connectivity: Features two RJ45 socket interfaces for connecting to the conference central unit via CAT6 network cables, ensuring stable and reliable connectivity for seamless communication.
- Video Tracking Functionality: Incorporates video tracking functionality to enhance meeting dynamics and engagement, allowing for automatic adjustment of video focus during presentations.
- Customizable Audio Settings: Microphone input gain, EQ, and automatic gain control can be individually set via the conference central unit, providing flexibility and optimizing audio quality for different meeting scenarios.

# SPECIFICATION

## POWER PARAMETERS

Power Supply:	Powered By Conference Central Control Unit, DC24V
Power Consumption:	≤3W

## AUDIO PARAMETERS

Audio Codec:	MP3/PCM/ADPCM
Audio Sampling Rate ,Bit Rate:	8Khz-48Khz, 16bit, 8Kbps-320kbps
SNR:	≥83dB
Frequency Response:	40Hz-18KHz


## MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Screen:	4 Inch Capacitive Touch Screen
Microphone Type:	Gooseneck Microphone
Directional Property:	Supercardioid
Product Color:	Black
Shell Material:	ABS+PC
Working Temperature:	0°C~+45°C
Working Humidity:	≤90%, No Condensation
Product Dimensions:	168×103×289 (mm)
Warranty:	2 Years

## ACCESSORIES

1×Microphone Pole
1×Waterproof Cotton
1×Quick Installation Guide
1×Quality Certificate
1×Warranty Card

## INTERFACE DESCRIPTION

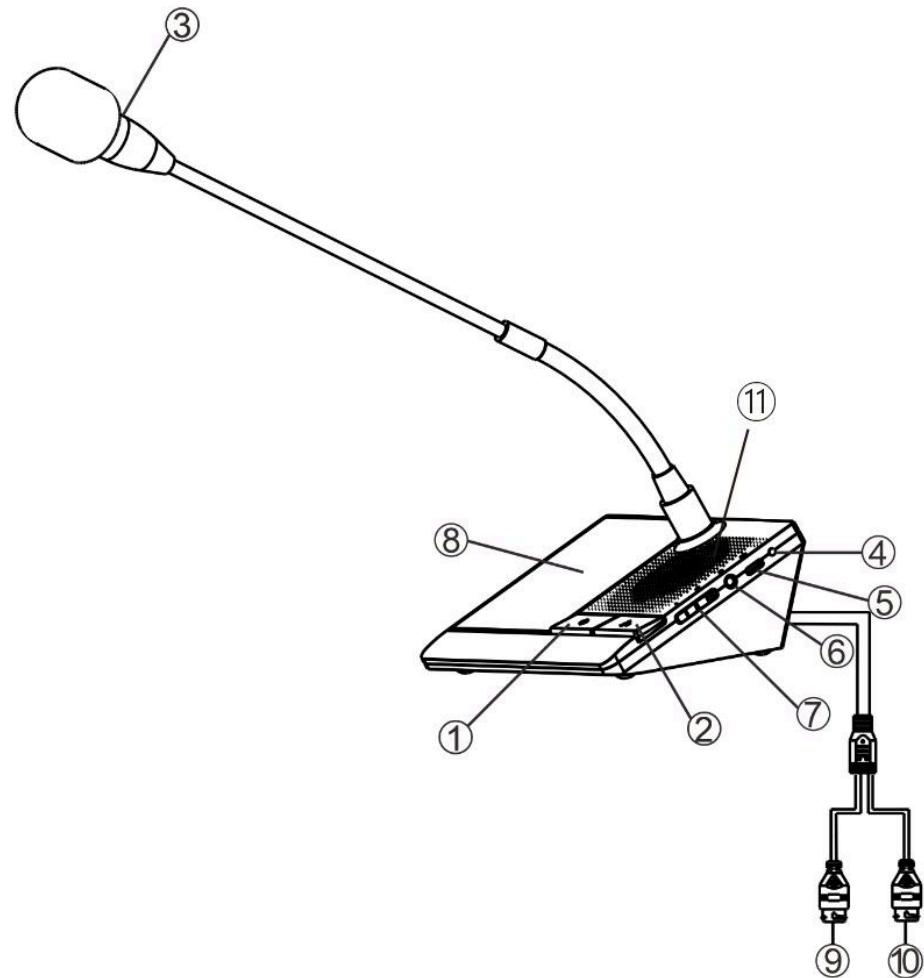

**① Ban Button**

**② Speak Button**

**③ Microphone Pole Status Light**

**④ Looped Network Status Light**

**⑤ Type-C Interface**

**⑥ 3.5mm Audio Interface**

**⑦ Volume Button+/-**

**⑧ Touch Screen**

**⑨ White Network Port:**


Connect to the OUT port of  
splitter.

**⑩ Black Network Port**

Connect to the RANG port of splitter.

**⑪ Speaker**

## CONNECTION DIAGRAM

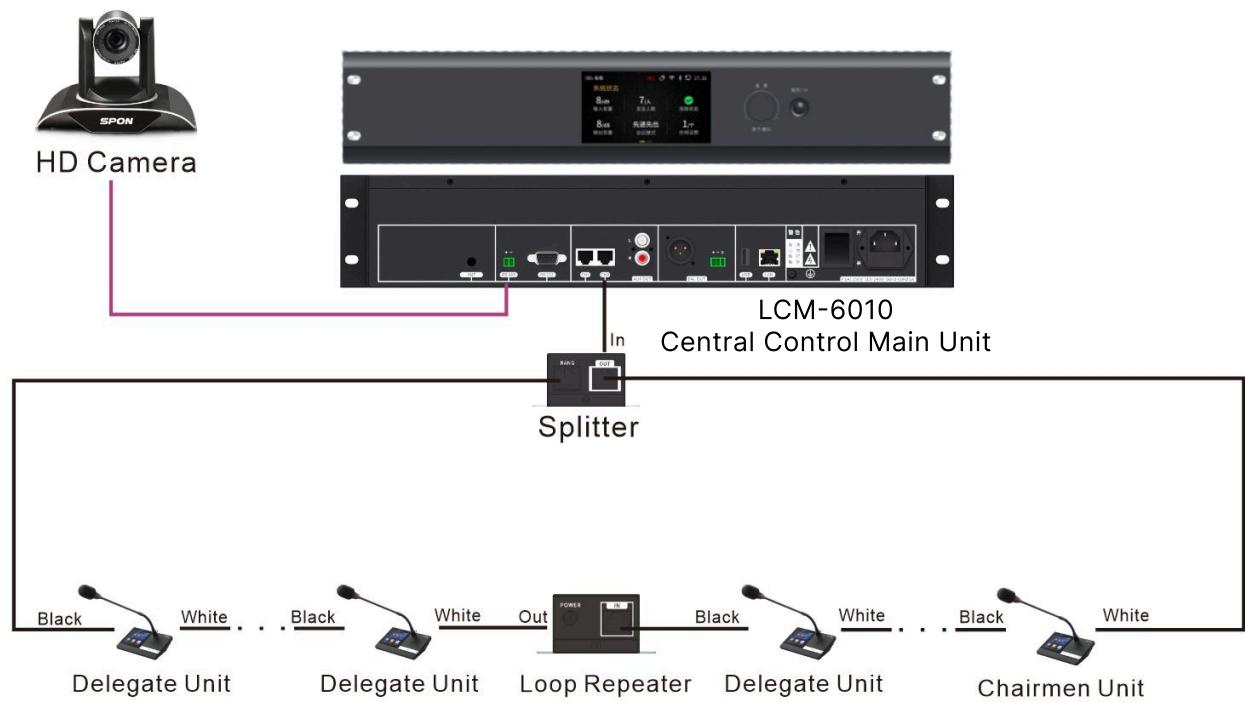

## DIMENSIONAL DRAWING

