



LCM-6013CVW-L

Wireless Digital Conference Chairman Unit



MAIN FEATURES

▲ Display and Controls

- Large, High-Resolution Display: Equipped with a 4-inch full-color TFT display with a resolution of 480*480, providing a spacious and clear visual interface.
- Chairman Authority Control: Empowers the chairman unit to manage speaker permissions, allowing them to approve or prohibit representatives from speaking, ensuring efficient meeting moderation.
- Intuitive Touch Controls: Three multifunctional touch buttons facilitate meeting sign-in and voting, enhancing user interaction and engagement.
- Real-time Speaker Information: Supports the real-time display of the current speaker's name, seat number, and speaking time, aiding in smooth communication flow and meeting organization.

▲ Wireless Connectivity and Security

- Versatile Frequency Bands: Supports wireless transmission across multiple frequency bands: 2.4GHz, 5.2GHz, and 5.8GHz, offering flexibility and compatibility in various environments.
- Robust Encryption: Utilizes WPA/WPA2 encryption for wireless transmission, ensuring secure data transfer and privacy protection during meetings.
- Long-lasting Battery: Powered by a 4000mAh polymer lithium battery, offering extended usage time, and detachable for convenient replacement or recharging.

▲ Additional Functionality

- Enhanced Video Tracking: Incorporates video tracking functionality to optimize visual engagement and presentation effectiveness during meetings.
- Customizable Audio Settings: Allows for individual adjustment of microphone input gain, EQ, and automatic gain control via the conference central unit, enabling personalized audio configurations for different meeting scenarios.

SPECIFICATION

POWER PARAMETERS

Power Supply:	Lithium Battery (4000mAh)
Power Consumption:	≤3W

AUDIO PARAMETERS

Audio Codec:	PCM/OPUS
Audio Sampling Rate ,Bit Rate:	48Khz, 16bit, 64Kbps-128Kbps
SNR:	≥83dB
Frequency Response:	40Hz-18KHz


ACCESSORIES

- 1×Microphone Pole
- 1×Waterproof Cotton
- 1×Quick Installation Guide
- 1×Quality Certificate
- 1×Warranty Card

MECHANICAL & ENVIRONMENTAL PROPERTIES


Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Screen:	4 Inch Capacitive Touch Screen
Microphone Type:	Gooseneck Microphone
Directional Property:	Supercardioid
Product Color:	Black
Shell Material:	ABS+PC
Working Temperature:	0°C~+45°C
Working Humidity:	≤90%, No Condensation
Product Dimensions:	168×103×289 (mm)
Warranty:	2 Years

DIMENSIONAL DRAWING

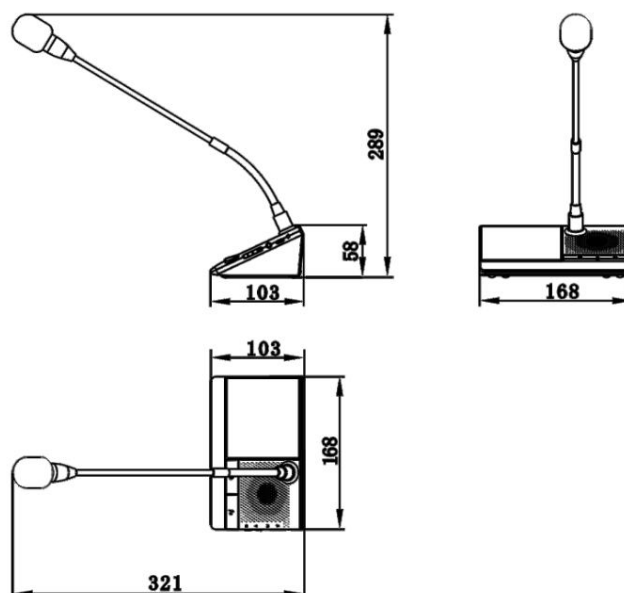


INTERFACE DESCRIPTION

[Front Panel]

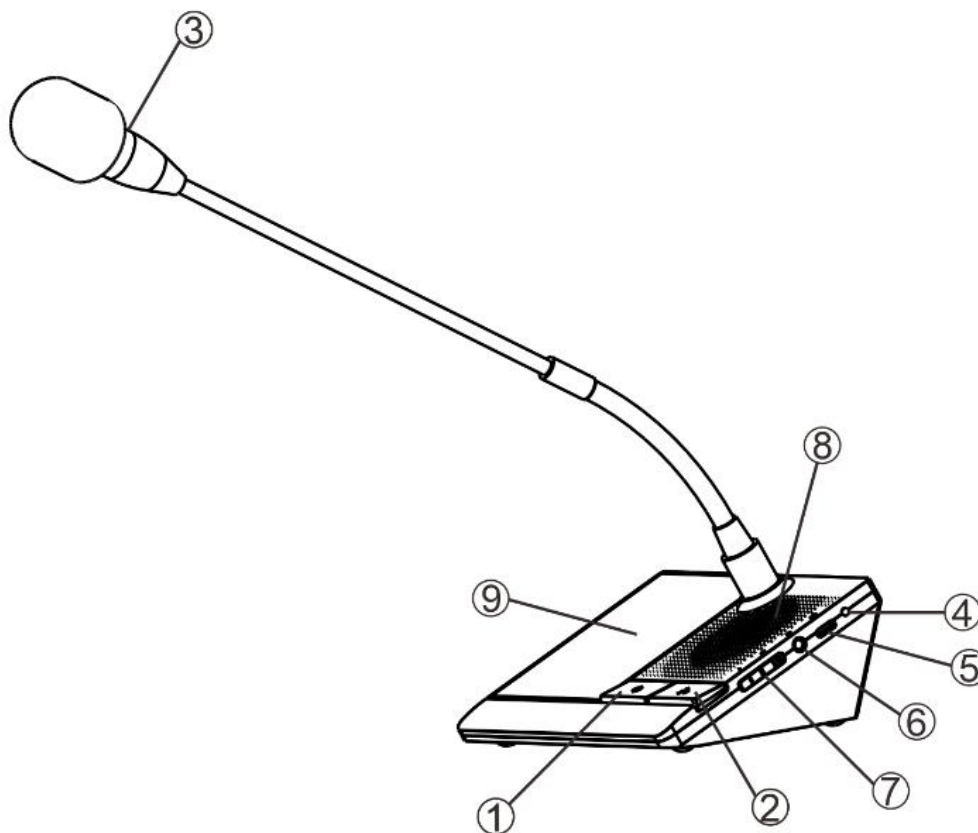

- | | | |
|--------------------------------|------------------------------------|--------------------------------|
| ① Ban Button | ④ Side Light | ⑦ Volume Button +/- (Reserved) |
| ② Speak Button | ⑤ Type-C Interface | ⑧ Speaker (Reserved) |
| ③ Microphone Pole Status Light | ⑥ 3.5mm Audio Interface (Reserved) | ⑨ Touch Screen |

[Rear Panel]

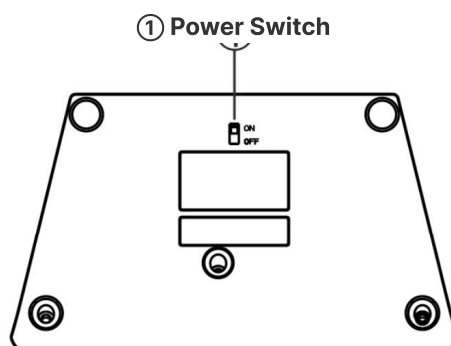

CONNECTION DIAGRAM

