



LCS-5251C/D

Unbounded Conference Microphone

- Video Tracking
- 4.3" Touchscreen
- High-Fidelity Microphone
- Digital and Analog Backup
- Representatives Management



Sign-in / Voting



4.3-Inch Touch Screen



Digital & Analog Backup

MAIN FEATURES



1. Microphone Design and Functionality

- **Elegant Design:** Square-shaped short rod microphone, aesthetically pleasing.
- **Digital Signal Transmission:** Offers strong anti-interference capabilities.
- **Self-Check Indicator:** Provides feedback on the current loop status.
- **High-Fidelity Sound Capture:** Long-distance sound capture with excellent reproduction.

2. Chairman Unit Features

- **Priority Control:** Chairman unit can mute other delegate units, asserting speaking priority.
- **Consent Button:** Approves speaking requests from delegate units in request-to-speak mode.



SPECIFICATION

POWER PARAMETERS

Power Supply:	Powered By Conference Central Control Unit, DC24V
Power Consumption:	≤3.5W

AUDIO PARAMETERS

Audio Codec:	MP3/PCM/ADPCM
Audio Sampling Rate ,Bit Rate:	8Khz-48Khz,16bit,8Kbps-320k bps
SNR:	≥83dB
Frequency Response:	40Hz-18KHz

INTERFACE

RJ45 Port *2

MECHANICAL & ENVIRONMENTAL PROPERTIES


Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Display:	4.3 Inch Capacitive Touch Screen
Product Color:	Black
Microphone Head:	2×14mm Diameter Gold-Plated Capacitive Microphone For Chairman Unit, 1x For Delegate Unit
Directional:	Supercardioid
Shell Material:	ABS/Aluminum Alloy
Working Temperature:	0°C~+45°C
Working Humidity:	≤90%, No Condensation
Product Dimensions:	220×98.8×107.6 (mm)
Warranty:	2 Years

ACCESSORIES


1×Network Cable(1m)
1×Quick Installation Guide
1×Quality Certificate
1×Warranty Card

INTERFACE DESCRIPTION


(Chairman Unit)

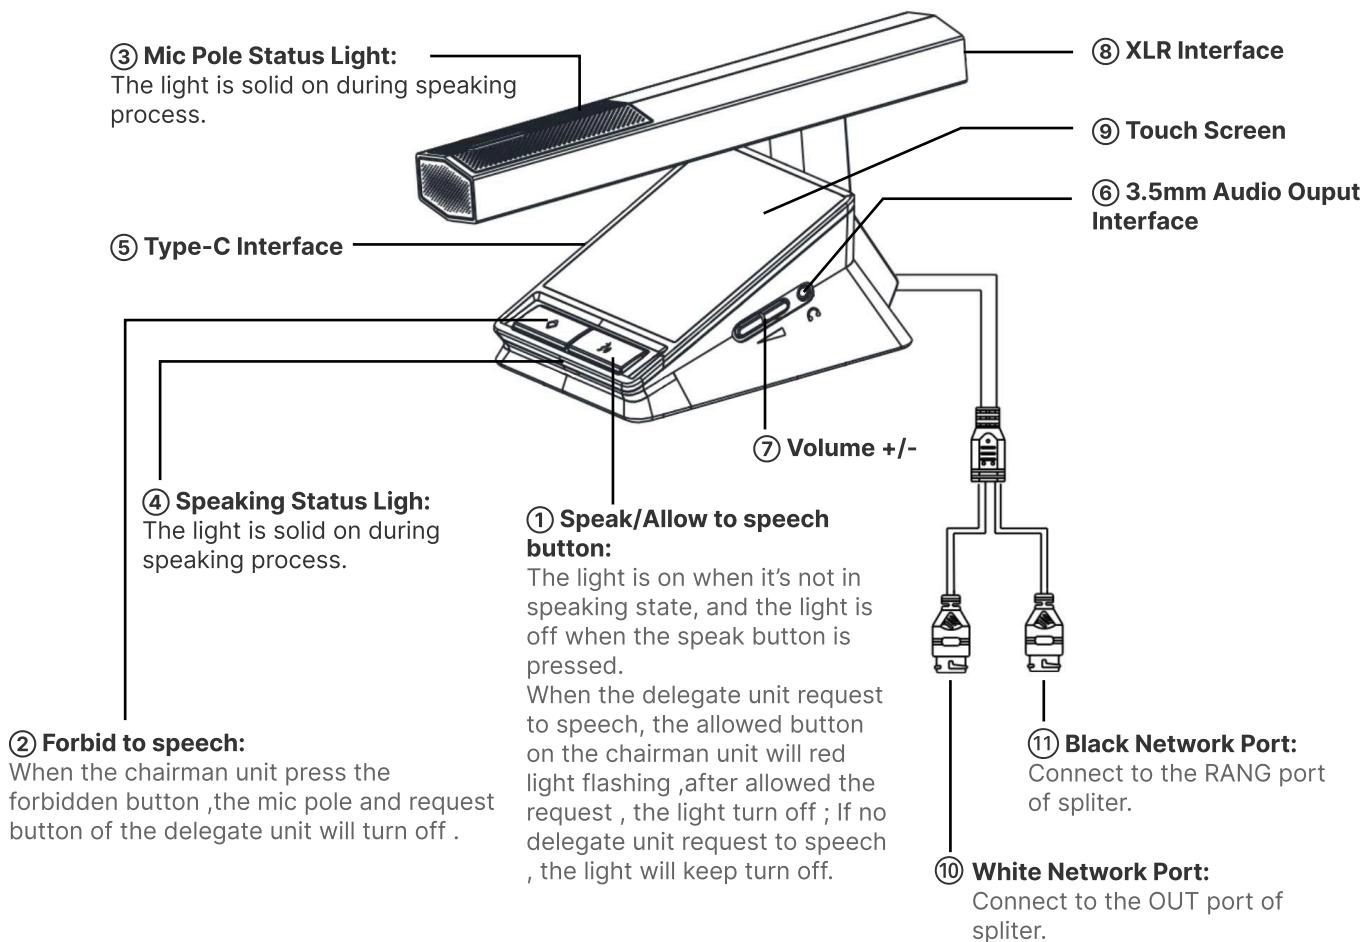

INTERFACE DESCRIPTION (Delegate Unit)

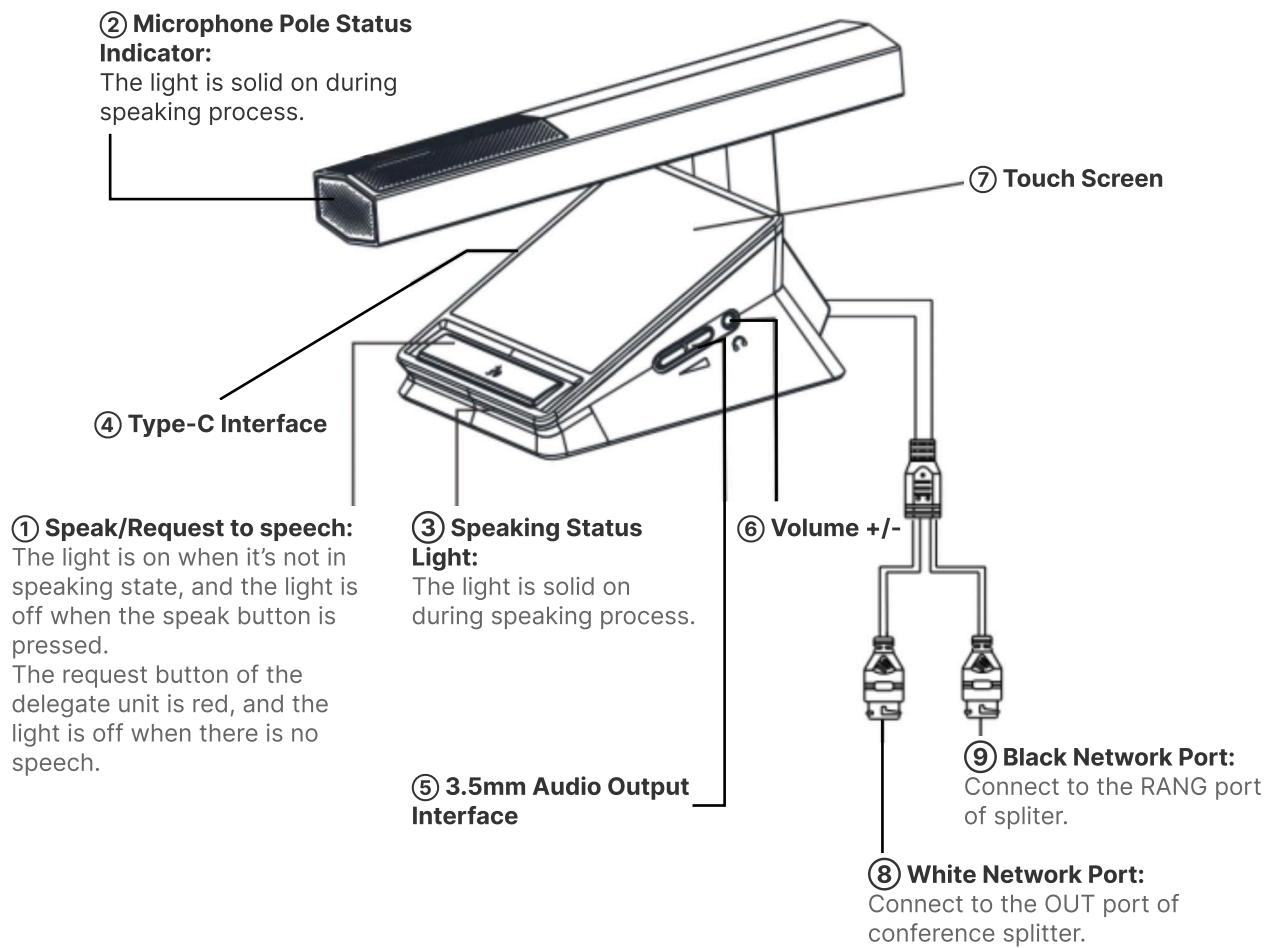

DIMENSIONAL DRAWING

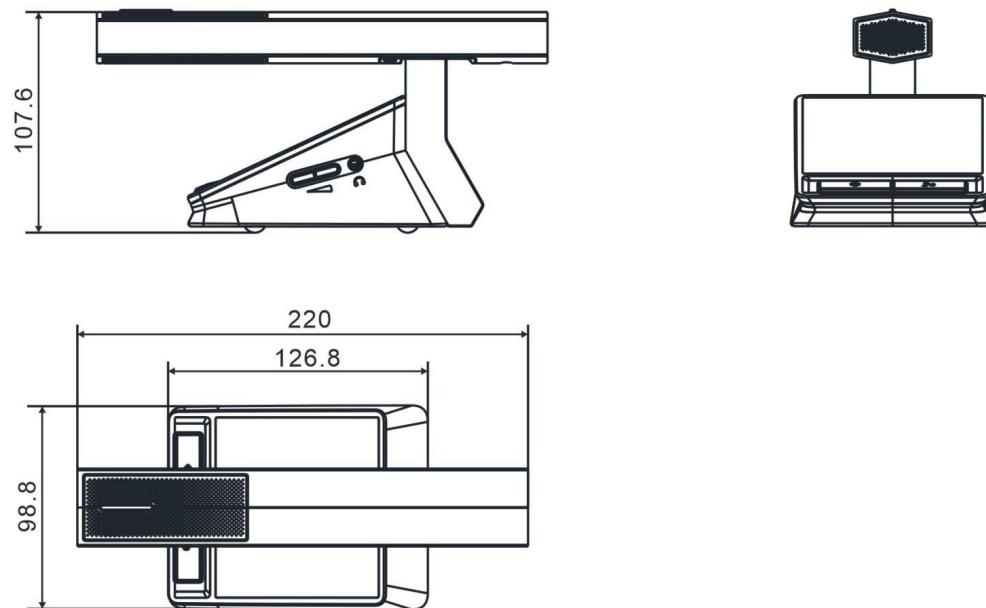

CONNECTION DIAGRAM

