



LCS-5251C-L/D-L

Chairman Unit & Delegate Unit

- Video Tracking
- 4.3" Touchscreen
- High-Fidelity Microphone
- Digital and Analog Backup
- Representatives Management



MAIN FEATURES

▲ Design & Audio Quality

- **Flexible Gooseneck Design:** Adjustable in 360 degrees, the microphone offers a versatile and customizable positioning for optimal use.

▲ technical advantage

- **Full Digital Signal Transmission:** Utilizes full digital signal transmission with robust anti-interference capabilities.

- **Self-check Indicator Light:** Equipped with a self-check indicator light, providing feedback on the current loop status.

▲ Chairman Unit Features

- **Priority Speaking Rights:** The chairman unit has priority speaking rights and can mute other delegate units at any time.

- **Consent Button:** The chairman unit is equipped with a "consent button," allowing approval of speaking requests from delegate units while in the request-to-speak mode.

SPECIFICATION

POWER PARAMETERS

Power Supply: Powered By Conference Central Control Unit, DC24V

Power Consumption: ≤3.5W

POWER PARAMETERS

Audio Codec: MP3/PCM/ADPCM

Audio Sampling Rate ,Bit Rate: 8Khz-48Khz, 16bit, 8Kbps-320kbps

SNR: ≥83dB

Frequency Response: 40Hz-18KHz

INTERFACE

RJ45 Port *2

ACCESSORIES

1×Microphone Pole

1×Waterproof Cotton

1×Network Cable (1m)

1×Quick Installation Guide

1×Quality Certificate

1×Warranty Card

MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method: Desktop

Installation Environment: Dry Indoor Locations

Display: 4.3 Inch Capacitive Touch Screen

Product Color: Black

Microphone Head: 14mm Diameter Gold-Plated Capacitive Microphone

Directional: Supercardioid

Shell Material: ABS/Aluminum Alloy


Working Temperature: 0°C~+45°C

Working Humidity: ≤90%, No Condensation


Product Dimensions: 114*100*355 (mm)

Warranty: 2 Years

INTERFACE DESCRIPTION

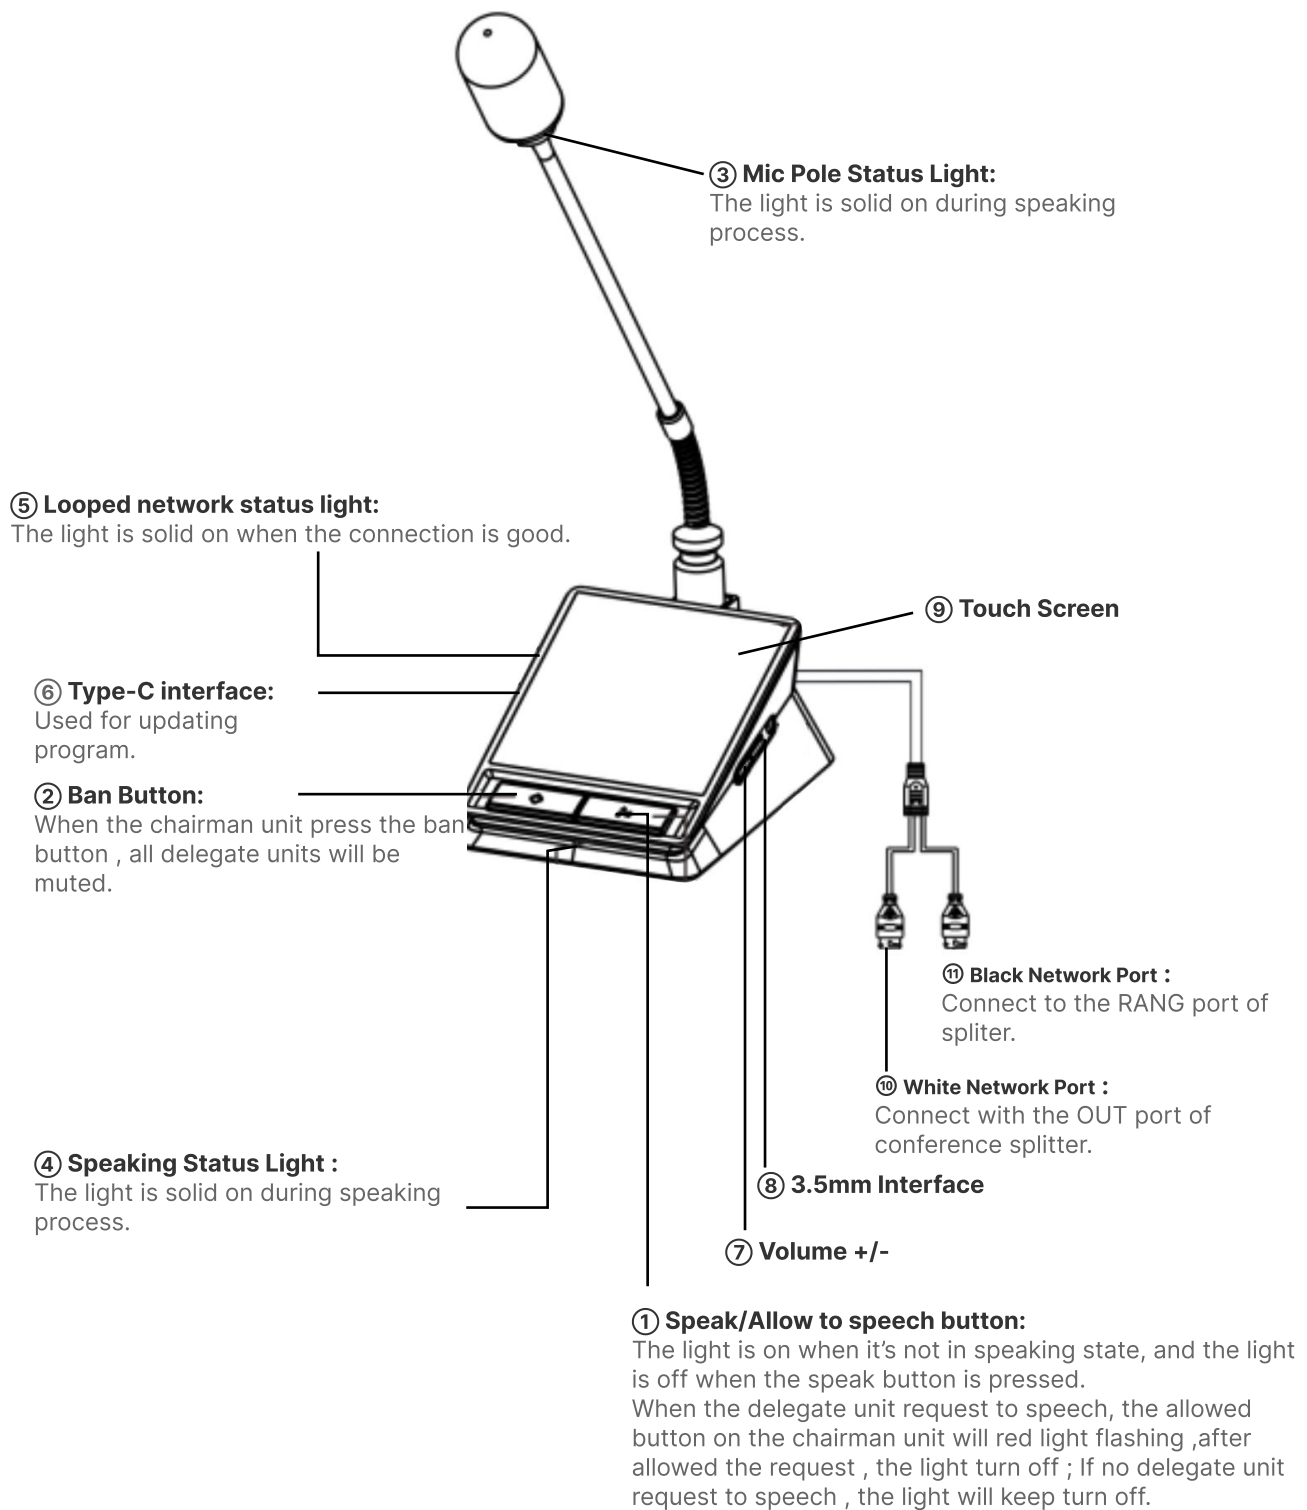

INTERFACE DESCRIPTION

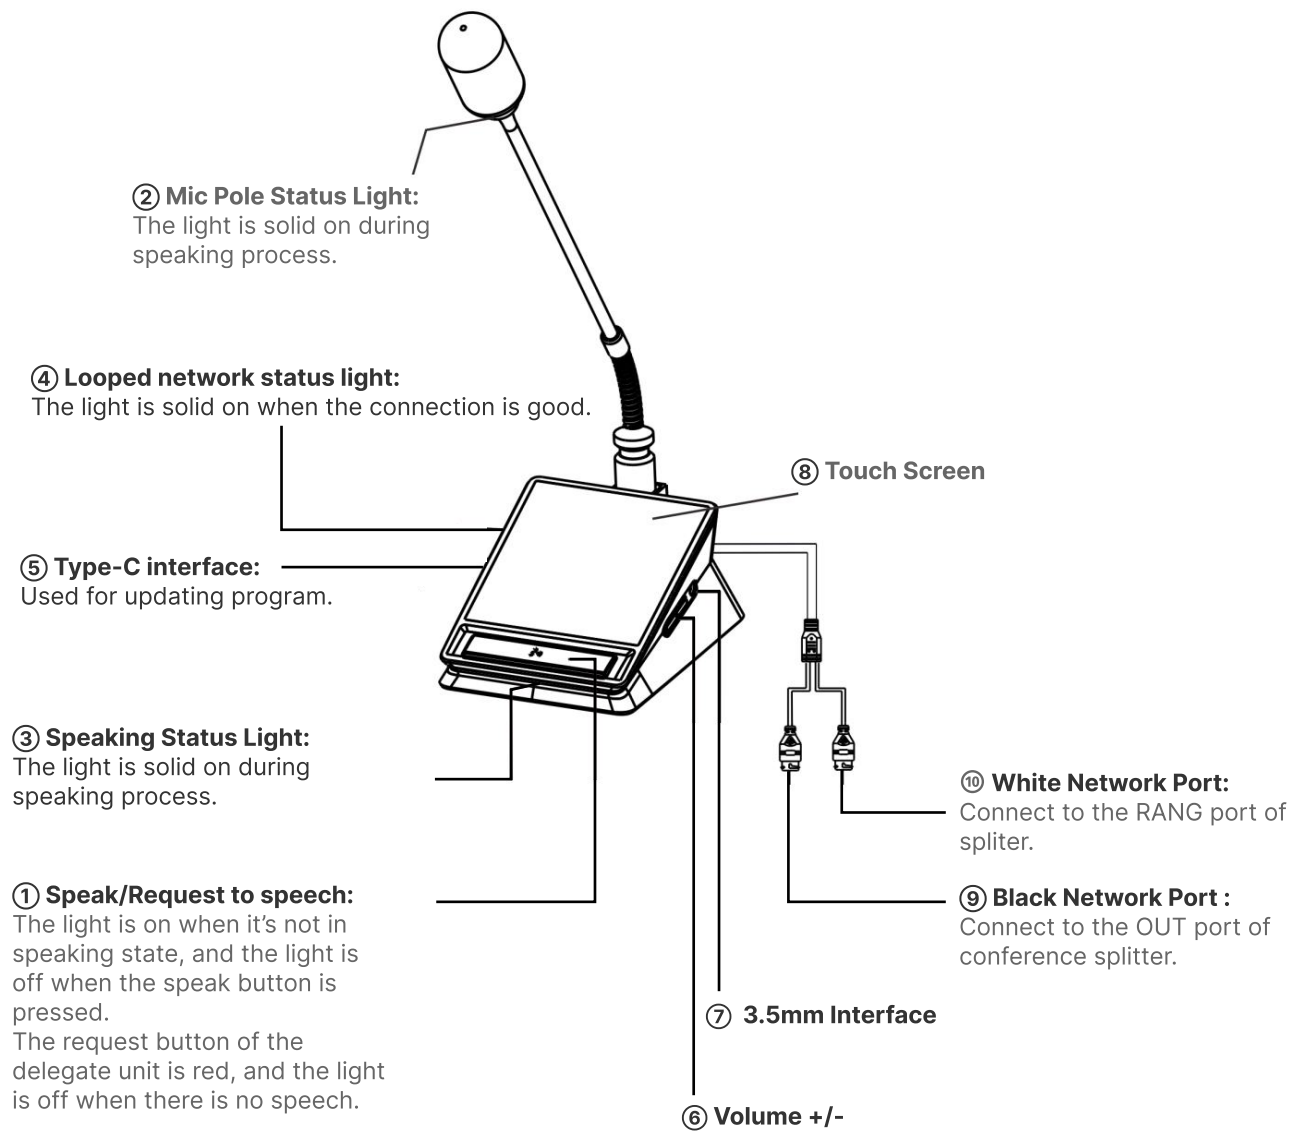

CONNECTION DIAGRAM

