



LCS-5252C-L

Wireless Digital Conference Chairman Unit

- Video Tracking
- 4.3" Touchscreen
- High-Fidelity Microphone
- Supports Type-C charging with charging base
- Representatives Management



4.3-Inch
Touch Screen

Type-C/Magnetic
charging

Voting/
Attendance

One touch
Mute

2.4-5.8G Hz

MAIN FEATURES

▲ Interactive Display

- High-Resolution Touchscreen:

4.3-inch full-color display with 480*480 resolution for an intuitive user interface.

▲ Meeting Management Tools

- Meeting Control:

Chairman unit manages meeting sign-ins, voting, and displays real-time results.

- Speaker Authorization:

Authority to approve or prohibit speech from delegate units.

- Real-Time Information Display:

Shows current speakers, seat numbers, and speaker queue.

▲ Intercom and Communication

- Directory Access:

Can access the intercom server directory for initiating IP intercom functions.

- IP Address Utilization:

Enables communication using IP addresses or directory listings.

▲ Design and Audio Quality

- Acoustic Chamber:

Microphone stem features a special design for aesthetics and sound quality.

- High-Fidelity Microphone:

Gooseneck microphone for long-distance sound capture.

- Ergonomic Base:

Meticulously designed for user comfort and style.

▲ Technical Advantages

- Digital Signal Transmission:

Offers strong resistance to interference.

- Status Indicators:

Speech status indicator light on the microphone stem and a light ring on the base.

- Wireless Connectivity:

Utilizes WiFi for seamless communication.

- Video Tracking:

Incorporates video tracking for enhanced meeting dynamics.

SPECIFICATION

POWER PARAMETERS

Power Supply: Lithium Battery (4000mAh)

Power Consumption: ≤3W

AUDIO PARAMETERS

Audio Codec: MP3/PCM/ADPCM

Audio Sampling Rate ,Bit Rate: 8Khz-44.1Khz,16bit,8Kbps-320k bps

SNR: ≥83dB

Frequency Response: 40Hz-18KHz

MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method: Desktop

Installation Environment: Dry Indoor Locations

Display: 4.3-Inch Capacitive Touchscreen,480*480

Product Color: Black

Shell Material: ABS/Aluminum Alloy

Microphone: 14mm Diameter Gold-Plated Capacitive Microphone

Directional: Supercardioid

Working Temperature: 0°C~+45°C

Working Humidity: ≤90%, No Condensation

Product Dimensions: 144×100×392 (mm)

Warranty: 2 Years

ACCESSORIES

1×Microphone Pole

1×Waterproof Cotton


1×Quick Installation Guide

1×Quality Certificate


1×Warranty Card

INTERFACE DESCRIPTION


[Front Panel]

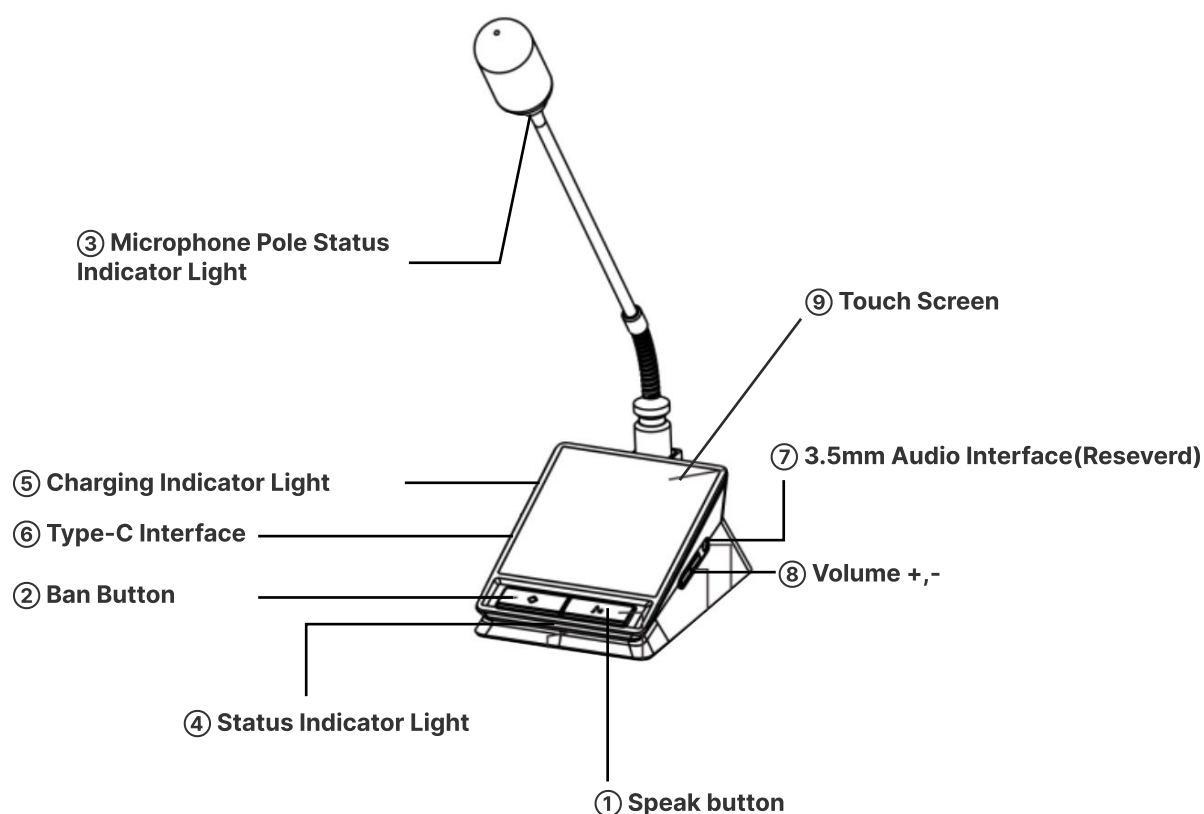

[Rear Panel]

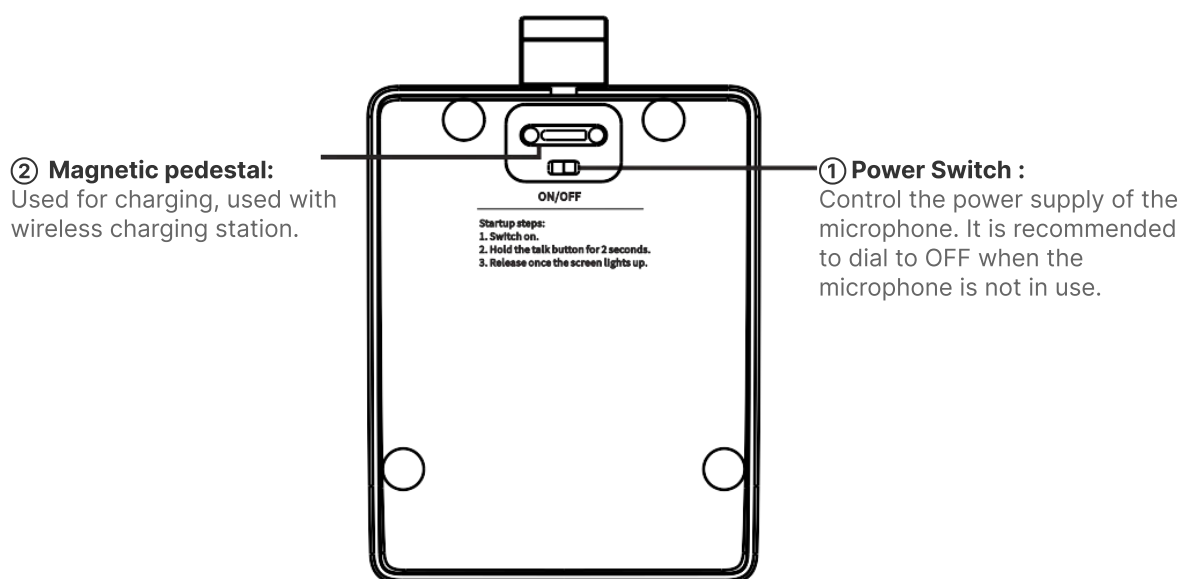

CONNECTION DIAGRAM

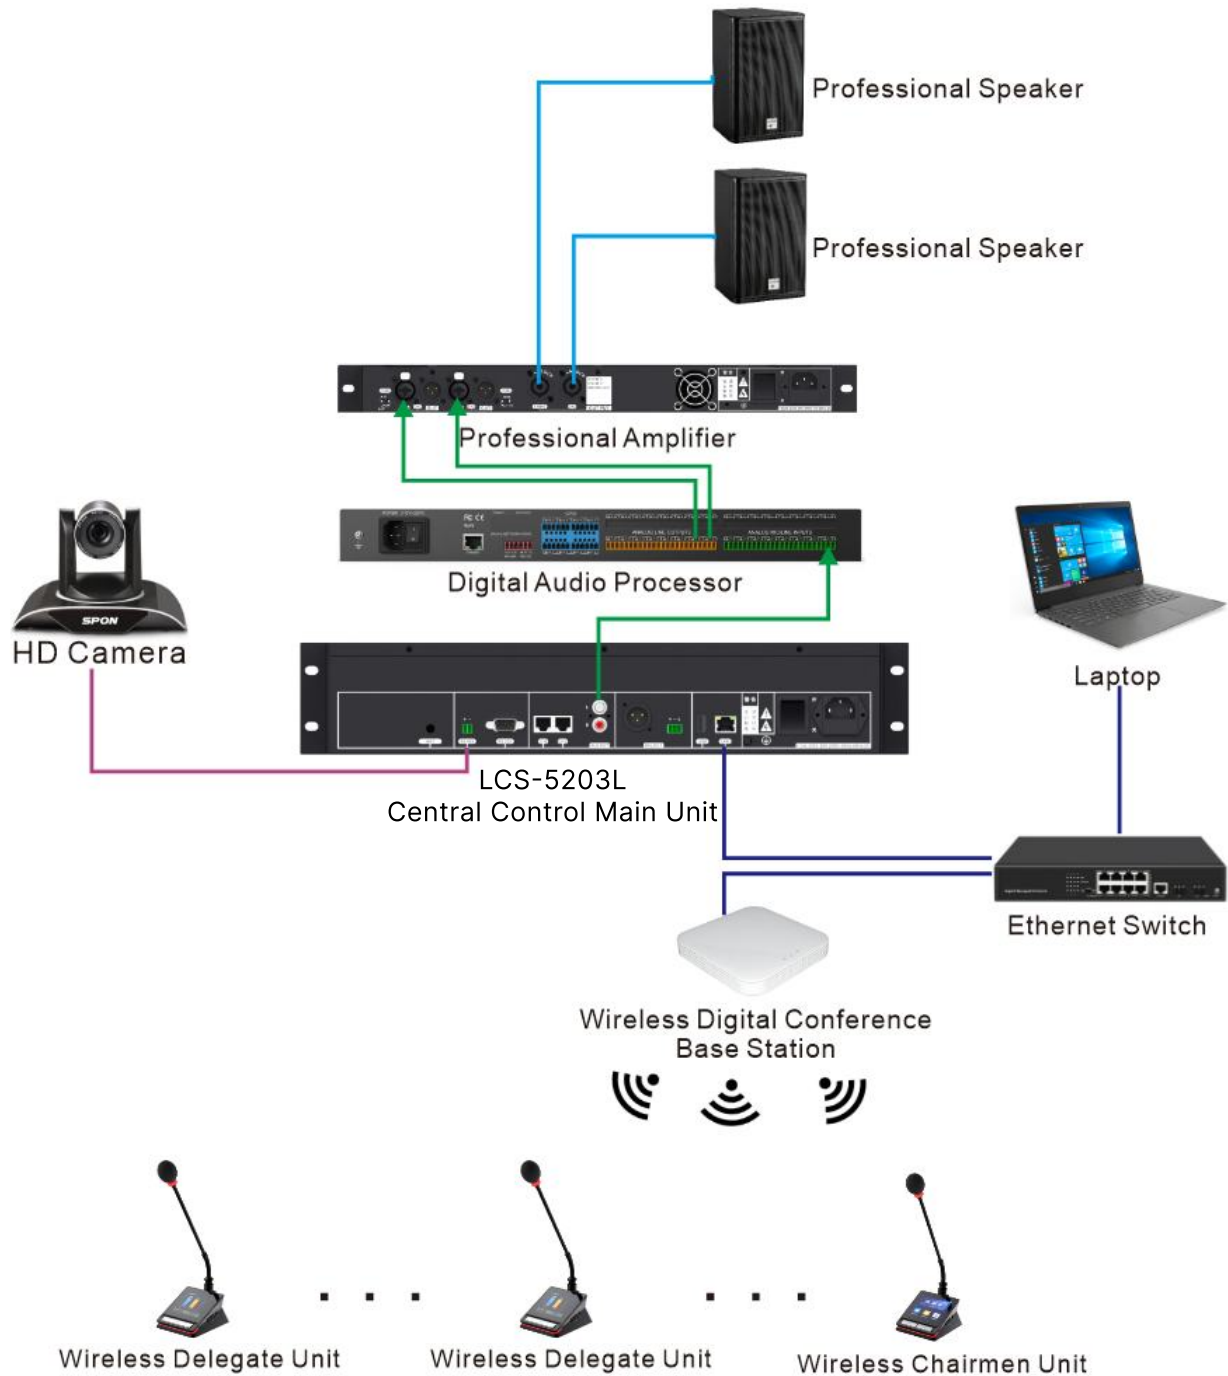

DIMENSIONAL DRAWING

