



## LCS-5252C

Wireless Digital Conference Chairman Unit

- Video Tracking
- 4.3" Touchscreen
- High-Fidelity Microphone
- Supports Type-C charging with charging base
- Representatives Management



Type-C/Magnetic charging

4.3-Inch Touch Screen

Voting/Attendance

One touch Mute

2.4-5.8G Hz

## MAIN FEATURES

### ▲ Interactive Display

- **High-Resolution Touchscreen:** 4.3-inch full-color display with 480\*480 resolution for an intuitive user interface.

### ▲ Meeting Management Tools

- **Meeting Control:** Chairman unit manages meeting sign-ins, voting, and displays real-time results.
- **Speaker Authorization:**  
Authority to approve or prohibit speech from delegate units.
- **Real-Time Information Display:** Shows current speakers, seat numbers, and speaker queue.

### ▲ Intercom and Communication

- **Directory Access:** Can access the intercom server directory for initiating IP intercom functions.
- **IP Address Utilization:** Enables communication using IP addresses or directory listings.

### ▲ Design and Audio Quality

- **Acoustic Chamber:** Microphone stem features a special design for aesthetics and sound quality.
- **High-Fidelity Microphone:** 14mm diameter super-cardioid gold-plated condenser microphone for long-distance sound capture.
- **Ergonomic Base:** Meticulously designed for user comfort and style.

### ▲ Technical Advantages

- **Digital Signal Transmission:** Offers strong resistance to interference.
- **Status Indicators:** Speech status indicator light on the microphone stem and a light ring on the base.
- **Wireless Connectivity:** Utilizes WiFi for seamless communication.
- **Video Tracking:** Incorporates video tracking for enhanced meeting dynamics.

## SPECIFICATION

### POWER PARAMETERS

Power Supply: Lithium Battery (4000mAh)

Power Consumption:  $\leq 3W$

### AUDIO PARAMETERS

Audio Codec: MP3/PCM/ADPCM

Audio Sampling Rate ,Bit Rate: 8Khz-44.1Khz,16bit,8Kbps-320k bps

SNR:  $\geq 83dB$

Frequency Response: 40Hz-18KHz

### MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method: Desktop

Installation Environment: Dry Indoor Locations

Display: 4.3 Inch Capacitive Touch Screen

Product Color: Black

Microphone Head: 14mm Diameter Gold-Plated Capacitive Microphone

Directional: Supercardioid

Shell Material: ABS/Aluminum Alloy

Working Temperature: 0°C~+45°C

Working Humidity:  $\leq 90\%$ , No Condensation

Product Dimensions: 220×98.8×107.6 (mm)

Warranty: 2 Years

### ACCESSORIES


1×Quick Installation Guide

1×Quality Certificate


1×Warranty Card

# INTERFACE DESCRIPTION


[ Front Panel ]

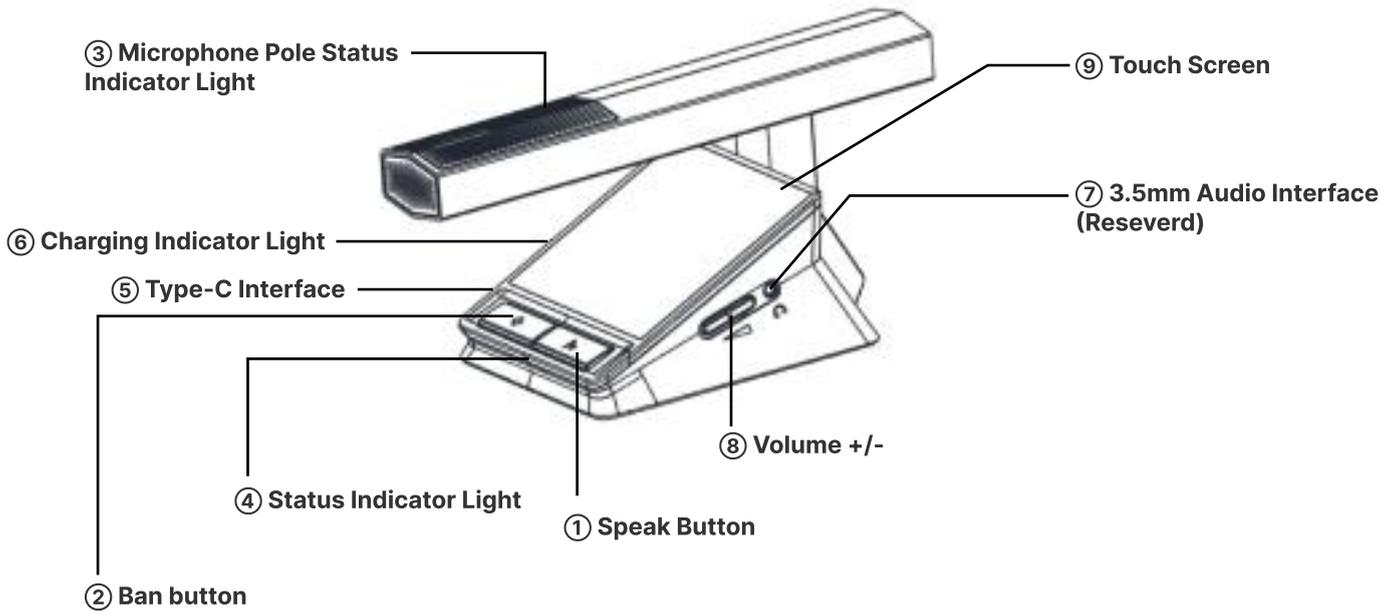

[ Rear Panel ]

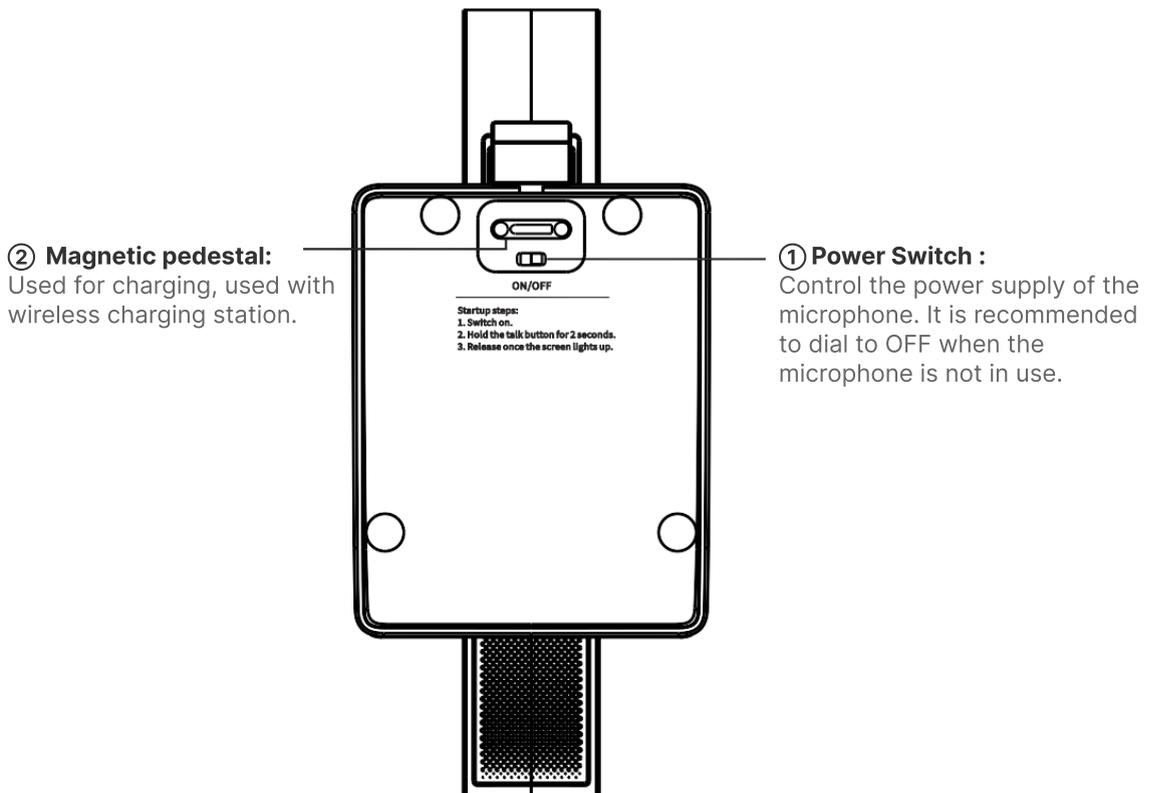

# CONNECTION DIAGRAM

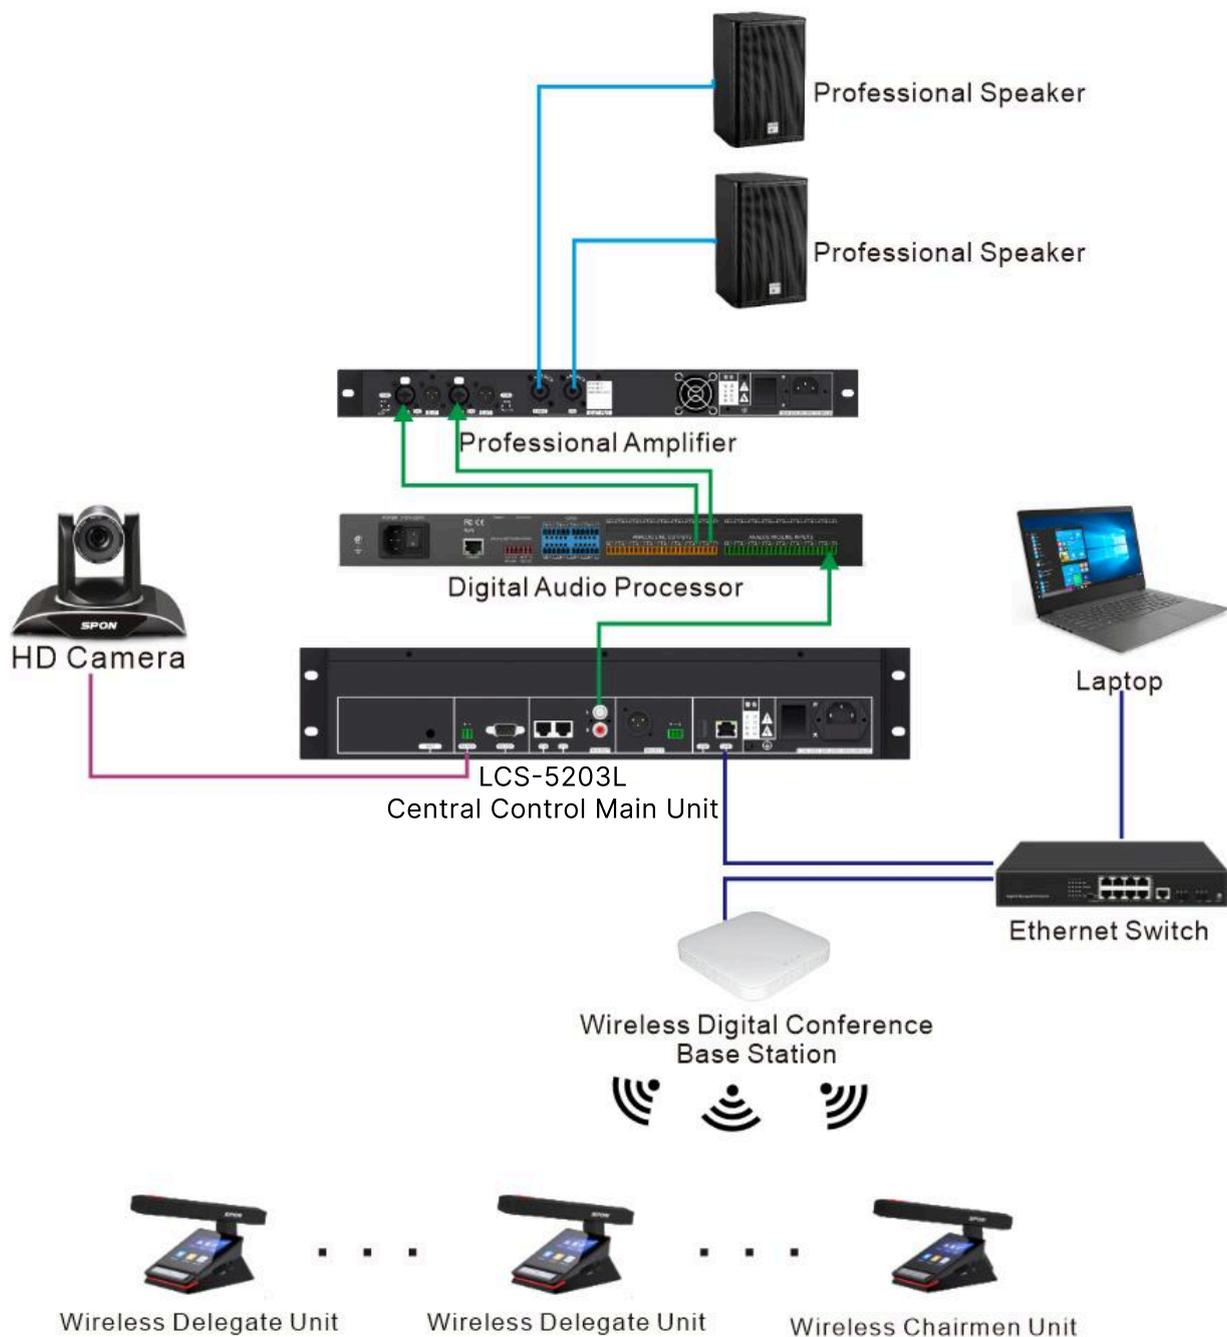

# DIMENSIONAL DRAWING

