



LCS-5302Z

Digital Conference System Charging Box



4 USB-A Ports


8 Magnetic Ports

120W Power

MAIN FEATURES

- There are 8 magnetic quick charging ports, providing a maximum output voltage of 13V ($\pm 0.5V$) and a charging current of 1A ($\pm 0.3A$).
- There are 4 USB regular charging ports, providing a maximum output voltage of 5V ($\pm 0.5V$) and a charging current of 1A ($\pm 0.3A$).

DIMENSIONAL DRAWING

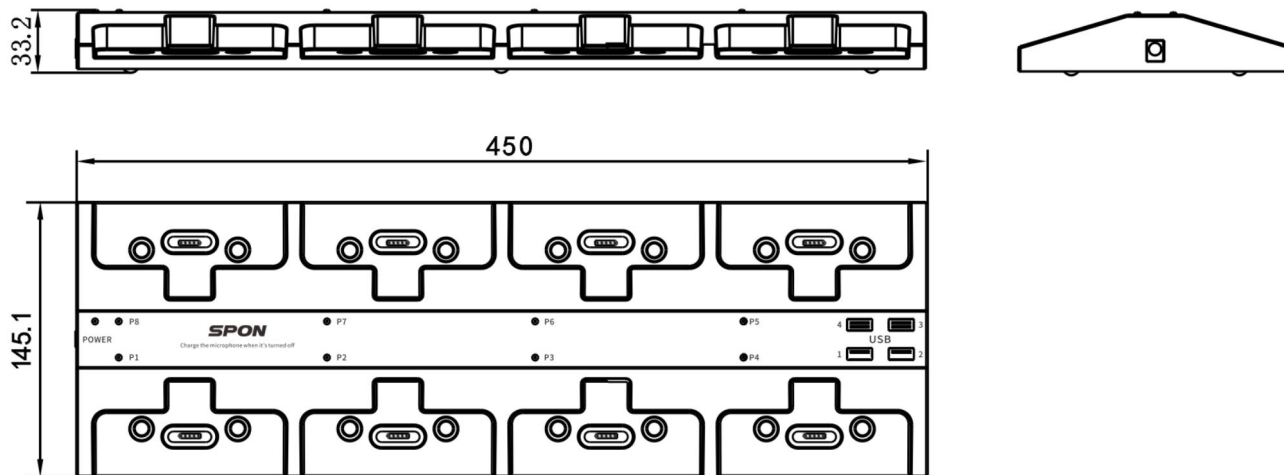

SPECIFICATION

POWER PARAMETERS

Power Supply:	DC24V/5A
Rated Output Power:	Total Output $\leq 120W$; Magnetic Single Path $\leq 12W$; USB Single Path $\leq 5W$
Standby Power Consumption:	$< 3.5W$

ACCESSORIES


1×Power Cord (3×1.0mm ² /1.5m) (Optional)
1×Power Adaptor(DC24V/5A) (Optional)
4×Type-C USB Cable
1×Quick Installation Guide
1×Quality Certificate
1×Warranty Card

GENERAL PARAMETERS

Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Housing Color:	Black
Housing Material:	ABS
Working Condition:	0 °C ~+45°C
Working Humidity:	$\leq 90\%RH$ (No Condensation)
Product Dimensions:	450×145.1×33.2mm
Warranty:	2 Years


INTERFACE DESCRIPTION

[Rear Panel]

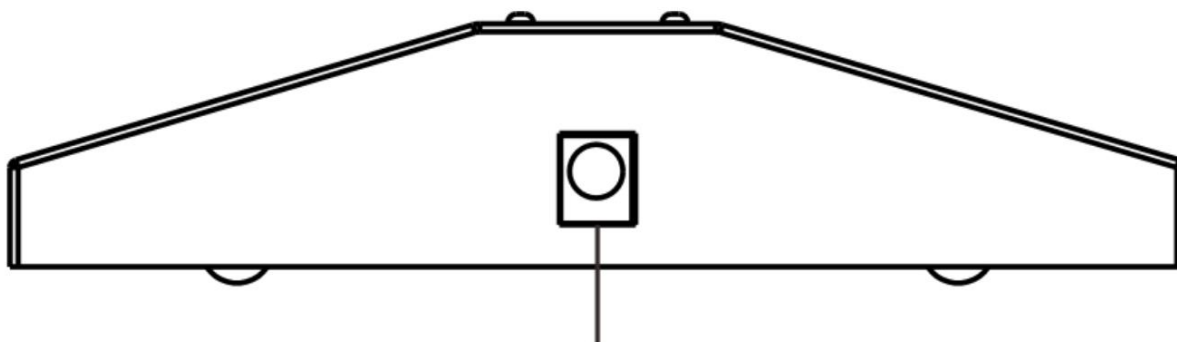

① Power Input Interface:
DC24V/5A Power Input.

[Front Panel]

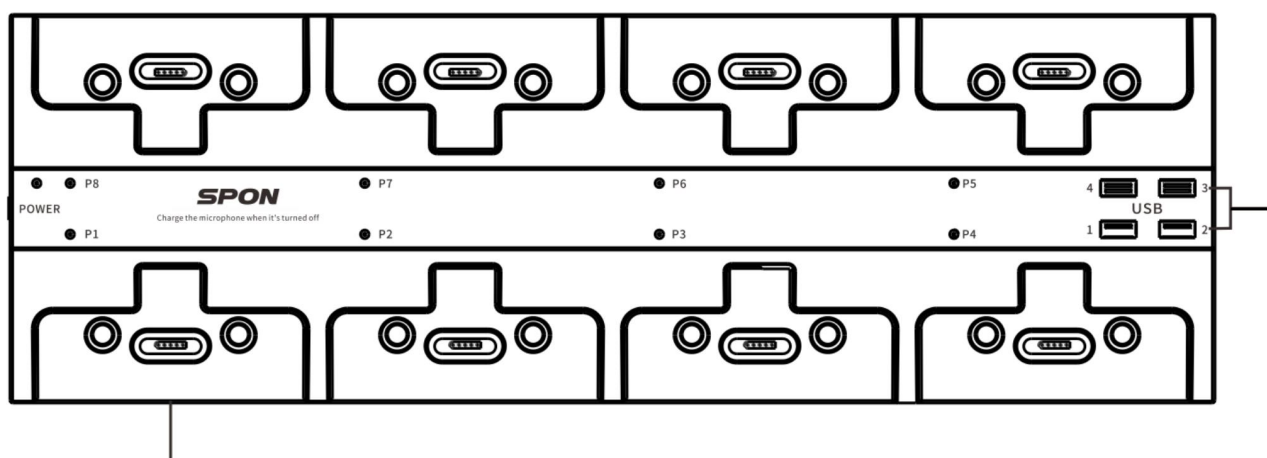

① 8-Way Magnetic Charging Interface:
Put The Microphone Unit On It, And
Charge The Microphone Unit Via Magnetic
Connection.

② 4-Way USB Interface:
5V/1A

