



NAC-2302H

Corridor Speaker

—
Sound Redefined, Anywhere You Choose.

FIXED VOLTAGE

WALL-MOUNT

MAIN FEATURES

- The Wall-mounted speakers NAC-2302H is a Small white plastic structure 6.5 inch bass paper basin wall-mounted speakers. Sound quality clear, bright, sturdy structure, easy to install, can be placed on the wall or free. Used in indoor corridor, passageway, room and other occasions.
- The Wall-mounted speakers NAC-2302H can be directly connected to the 100V line output end. Wall-mounted speakers on the 100V transformer, primary winding jumper connector can be used for power Settings, users can achieve power selection.

CIRCUIT DIAGRAM



Wiring:

When wiring, the power amplifier output COM shall be connected with the black terminal, and the power amplifier output 100V shall be connected as follows:

- 1.Using rated power 6W: the power output 100V shall be connected with white terminal .
- 2.Using rated power 3W: the power output 100V shall be connected with red terminal .

SPECIFICATION

ELECTIRC PARAMETERS

Speaker unit	6.5 inch cone speaker
Max power rate	10W
Rated Power(PHC)	6W
Frequency(1kHz,1meter)	92dB±2dB
Valid Frequency range(-10dB)	150-15kHz
Rated Voltage	100V
Input port	Spring card buckle
Color of input port	black, white ,red

PRODUCT INFORMATION

Shell	Wooden
Mesh	Aluminum mesh painted silver



RAW METERIAL

Working temperature	-25°C~+55°C
Working humidity	-40°C~+70°C
Relative humidity	< 95%

PRODUCT INFORMATION


Product Size	275(L)x185(W)x120(H)mm
Weight	1.2kg
Installation method	Wall-mounted

DIMENSIONAL DRAWING

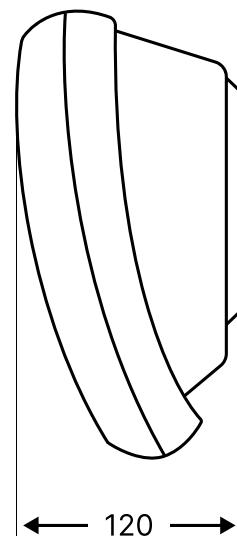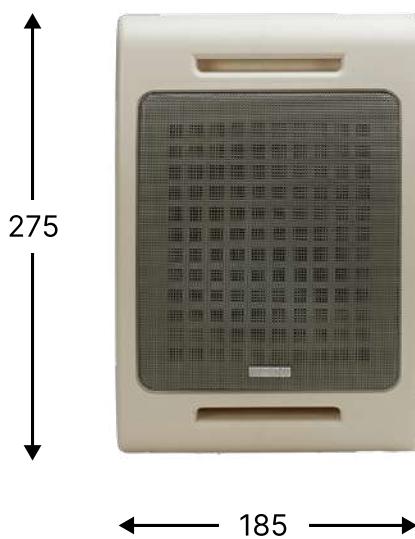


APPLICATIONS

The analog wall-mounted speaker NAC-301H can be connected with IP audio speaker XC-9602B for receiving broadcast or announcement from server software or IP paging mic .

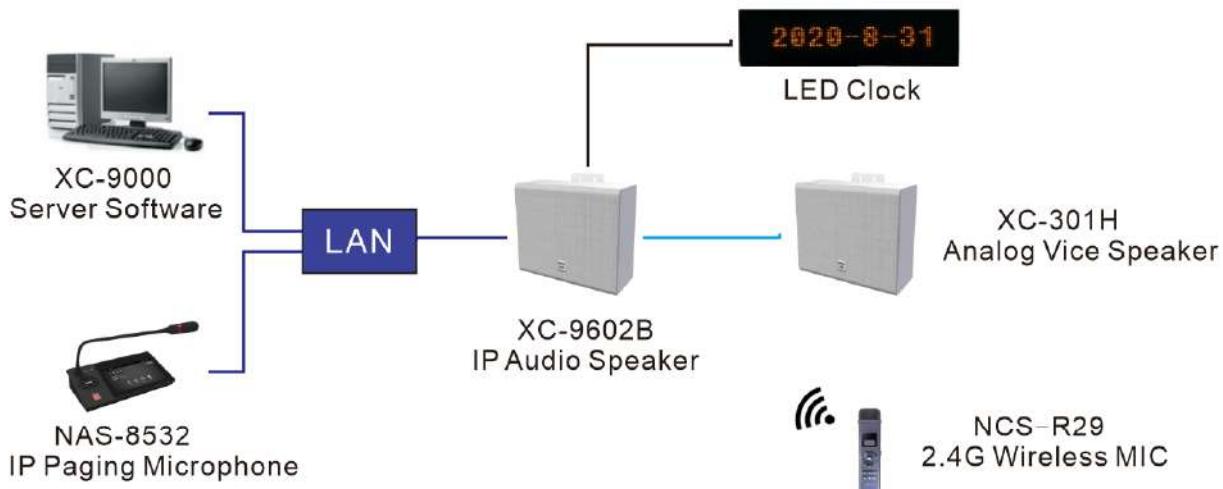

INSTALLATION DIAGRAM

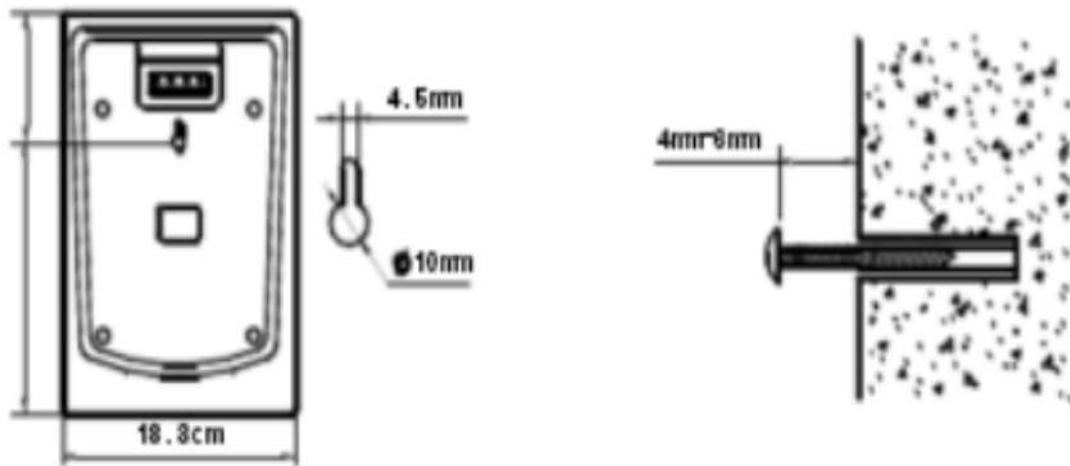

- Install a screw with a diameter of 4mm at an appropriate position on the wall where speakers need to be installed. The nail cap is 4-6mm away from the wall.
- Connect the audio broadcast transmission line.
- Hang up the speaker, adjust the Angle and check whether the installation is firm.

CASE

