



## NAC-2304

### Wall Mount Speaker


The NAC-2304 features a lightweight and compact design, making it ideal for use in school corridors. It is commonly used to signal class times, play scheduled audio tasks, and provide background music.



## SPECIFICATION

Frequency Response	180-18KHz
Sensitivity	90dB±3dB(1m/1w)
Rated Power	6W
Power Taps	3W/6W
Line input	100V
Material	ABS
Component	5" *1
Finished Colour	White
Finished Colour	0.8kg
Dimension(mm)	175*200*100
Operatiing Temperature	-25°C~+55°C
Warranty	2 Years

## CIRCUIT DIAGRAM

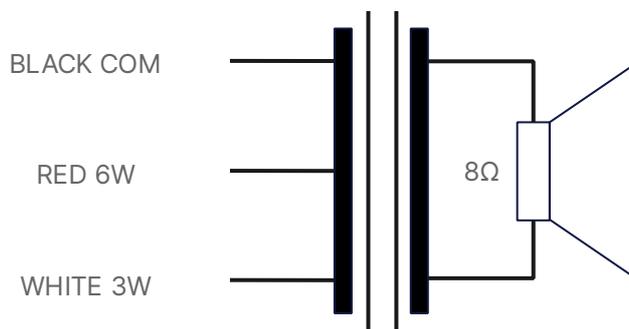

### Wiring:

When wiring, the COM (common) terminal of the power amplifier should be connected to the black terminal, and the 100V output of the power amplifier should be connected as follows:

- For rated power of 3W: connect the 100V output to the white terminal.
- For rated power of 6W: connect the 100V output to the red terminal.

## INSTALLATION

unit: mm

