



NAC-2503LI

30 Watt 8Ω Horn Speaker


Powerful Sound Beyond Boundaries

- Horn Speaker
- IP66
- Constant Impedance

MAIN FEATURES

The NAC-2503LI horn speaker which has the characteristics of solid durability, long service life, clear sound, wide diffusion range, etc., suitable for indoor and outdoor environments such as vehicles, stations, docks, and squares. It is suitable for public security and urban management, tourism, teaching, transportation, environmental sanitation, business and other industries to broadcast and use.

CIRCUIT DIAGRAM

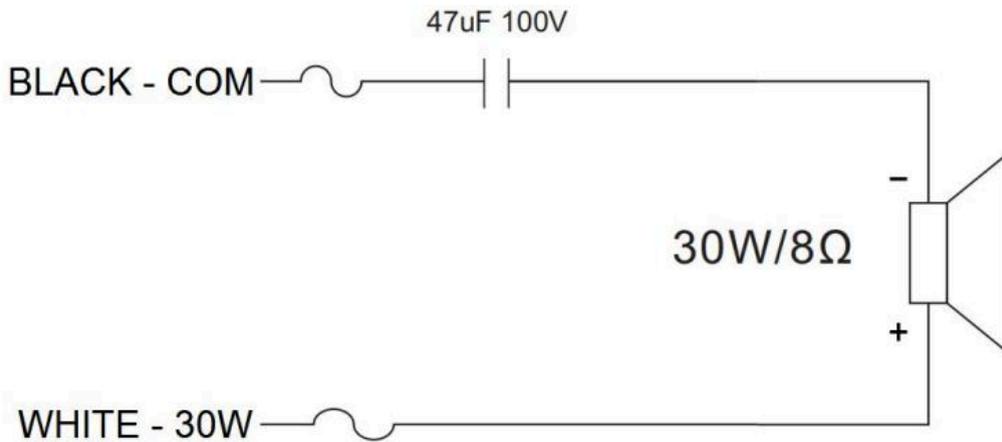

SPECIFICATION

POWER PARAMETERS

Rated Power Output 30W

Max Power Output 40W

AUDIO PARAMETERS

Frequency Response 300Hz-7.5KHz

SPL 110±3db

Dispersion Angle(@1kHz/-6dB) 140

Rated Impedance 8Ω

ACCESSORIES

1 × Horn Speaker

1 × Quick Installation Guide

1 × Quality Certificate And Warranty Card

MECHANICAL&ENVIRONMENT PROPERTIES

Mounting Method Wall-Mounted Or Podetium

Installation Environment Outdoor Locations

Operatiing Temperature -25°C~+55°C

Operating Humidity <95%

Body Material ABS

Production Level IP66


Color White

Product Dimensions 285×205×285mm

Product Weight 1.79Kg


Product Warranty 2 Years

DIMENSIONAL DRAWING

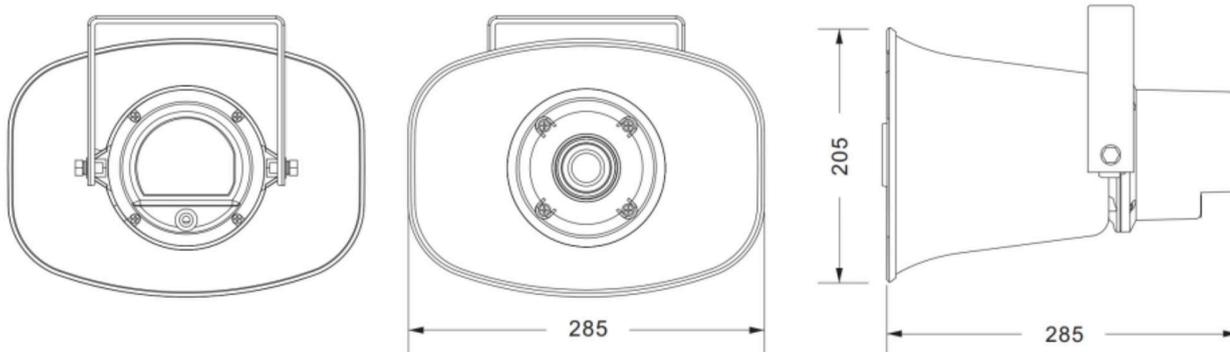


APPLICATIONS

The 30Watt 80hm Horn Speaker NAC-2503LI can be connected with constant resistance amplifier for receiving broadcast or announcement from Audio Management Software or IP paging console .

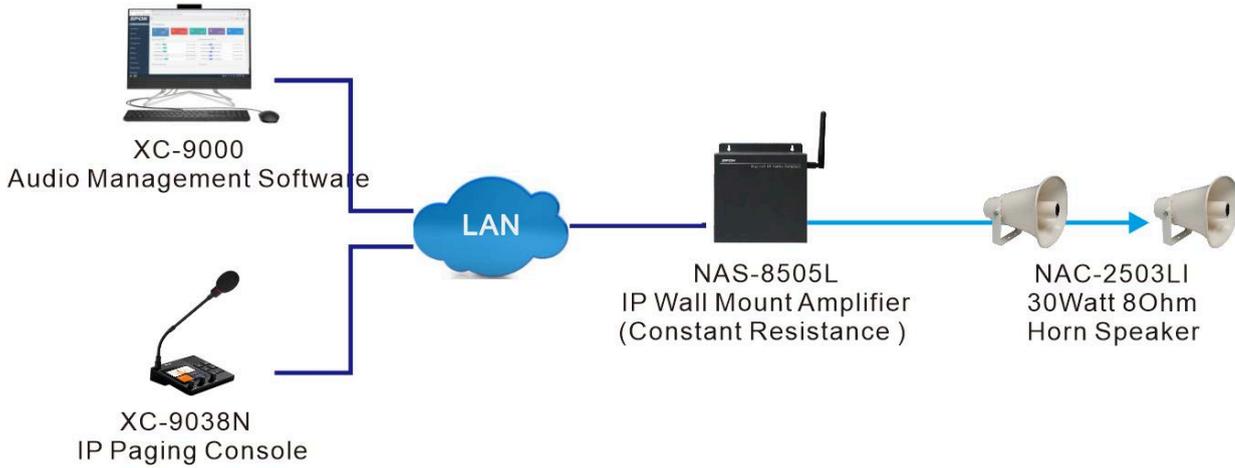


INSTALLATION DIAGRAM

1. First, drill 3 mounting holes suitable for M10 expansion screw on the wall, the distance between the holes is 50mm, and then use M10 expansion screw.

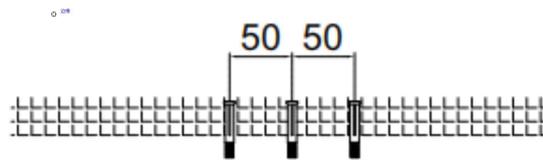

2. Align the hole on the product bracket with the pre-madescrew on the wall, lock the M10 nut, and fix the product on the wall.

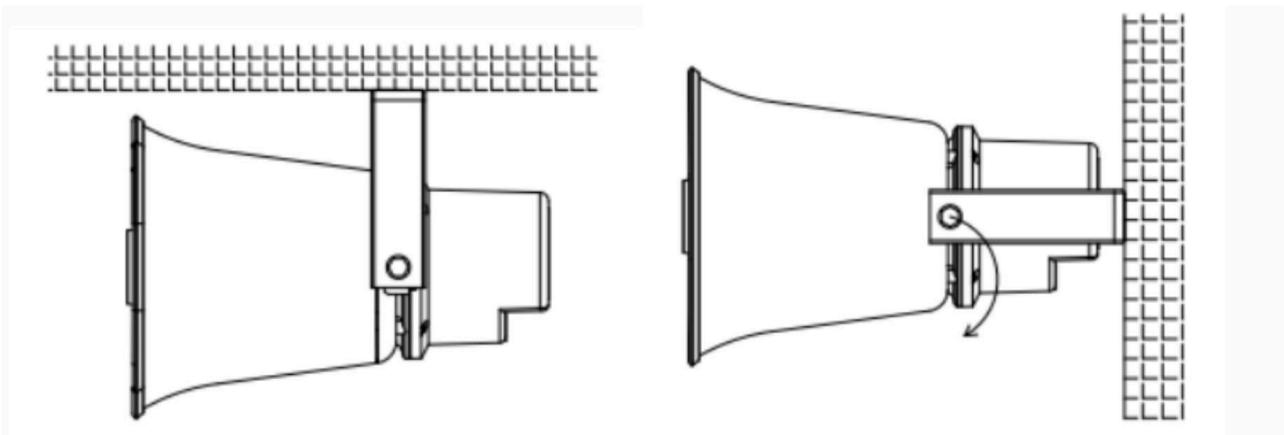

CASE

