



NAC-301C-CP


Wall Speaker

Composite speaker diaphragm, with clear and melodious sound quality, easy and quick installation, composite suspension edge and damping treatment, longer lifespan


Constant Voltage

Clear Voice

CIRCUIT DIAGRAM

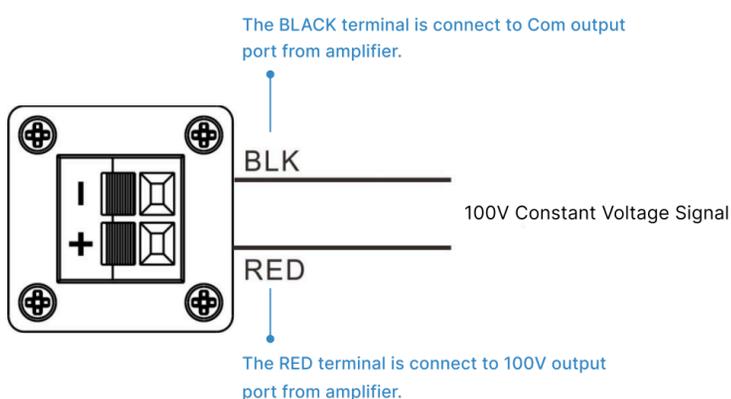

DIMENSIONAL DRAWING

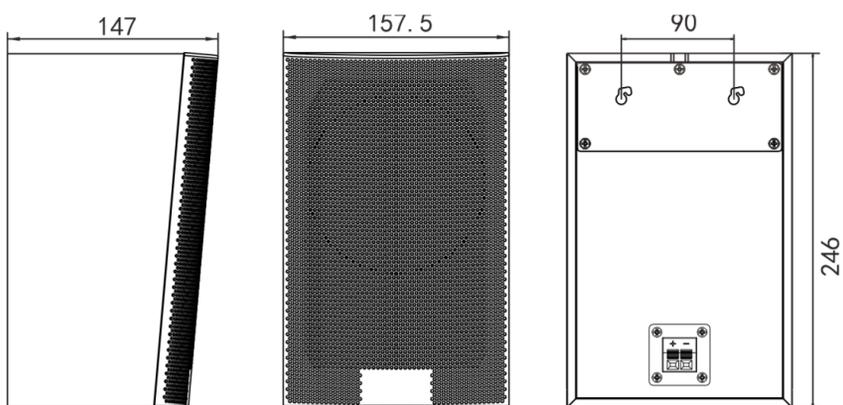

01

SPECIFICATION

POWER PARAMETERS

Rated Power:	10W
Input Voltage:	100V

SPEAKER PARAMETERS

Sensitivity:	87dB±3dB
Frequency Response:	200Hz-20KHz
Speaker Unit:	1×5 Inch Paper Cone Full Range Speaker

MECHANICAL & ENVIRONMENT PROPERTIES

Mounting Method:	Wall-Mounted
Installation Environment:	Dry Indoor Locations
Product Color:	White
Body Material:	Wooden
Product Dimensions:	246*157*147mm
Product Weight:	1.5KG
Warranty:	2 Years


ACCESSORIES

- 1×Installation Manual
- 1×Certification Card
- 3×Plastic Expansion Set
- 3×Cup Head Self-Tapping Screw(M4*35)
- 1×Bracket

APPLICATION

Application 1

The 10Watt 100Volt Wall Mount Speaker NAC-301C-CP can be connected with IP Amplifier XC-9508 for receive broadcasting or announcement from Audio Management Software or IP paging Console.

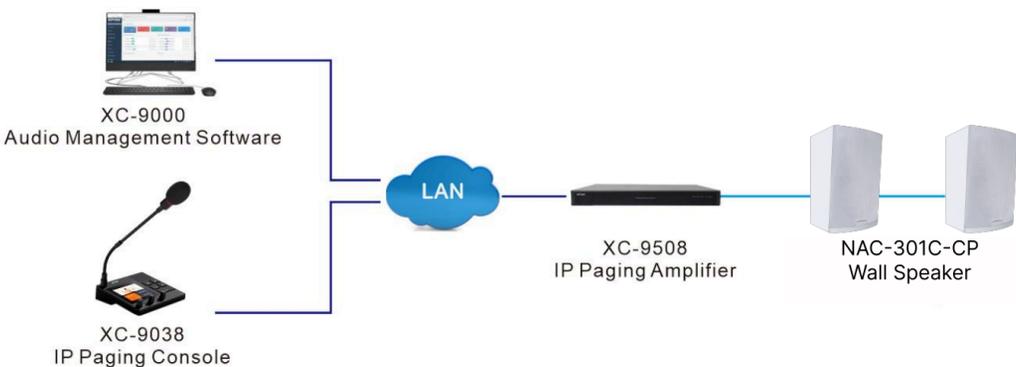

02

INSTALLATION INSTRUCTIONS

STEP 1

M4 screw Bracket Plastic expansion set

Use 2 plastic expansion sleeves and 2 M4 screws to install the bracket horizontally.

STEP 2

IP network active speaker

Align the two mounting holes on the back of the device with the two rivets of the bracket insert it from the large opening of the mounting hole, and then move it up and right to iam and buckle the device on the rivets of the bracket on the wall.

