


MAIN FEATURES

• Outdoor waterproof column speaker, for human voice, music has the real acoustic amplification characteristics, made of aluminum alloy material, more suitable for outdoor all-day use. Such as tennis courts, swimming pools, gardens, school playgrounds, markets.

CIRCUIT DIAGRAM

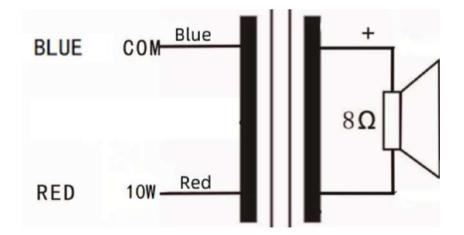

Wiring:

When wiring, the power amplifier output COM shall be connected with the blue terminal, and the power amplifier output 100V shall be connected as follows:

Using rated power 10W: the power output 100V shall be connected with red terminal.

SPECIFICATION


POWER PARAMETERS			
Rated Power:	10W		
Max Power:	15W		

AUDIO PARAMETERS		
Sensitivity:	91dB±3dB	
Frequency Range:	130-14kHz	
ACCESSORIES		

ACCESSORIES	
1×Quick User Guide	
1×Certificate of quality and warranty card	
2×Type-L Bracket	


MECHANICAL & ENVIRONMENTAL PROPERTIES		
Installation Method:	Wall Mount	
Installation Environment:	Outdoor Locations	
Shell Material:	Aluminum sprayed , champagne or silver	
Mask Material:	Aluminum alloy sprayed , black	
Operatiing Temperature:	-10°C~+55°C	
Operating Humidity:	≤90% RH non-condensing	
Dimension:	151×125×295(mm)	
Weight:	2.4KG	
Warranty:	2 Years	

DIMENSIONAL DRAWING

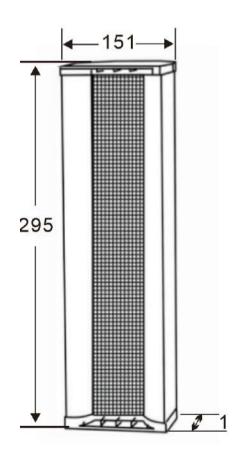


APPLICATIONS

The 10Watt 100Volt outdoor column speaker NAC-510 can be connected with constant voltage amplifier for receiving broacast or announcement from server software or IP paging mic.

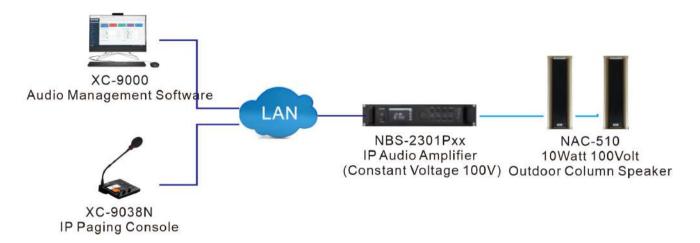

INSTALLATION DIAGRAM

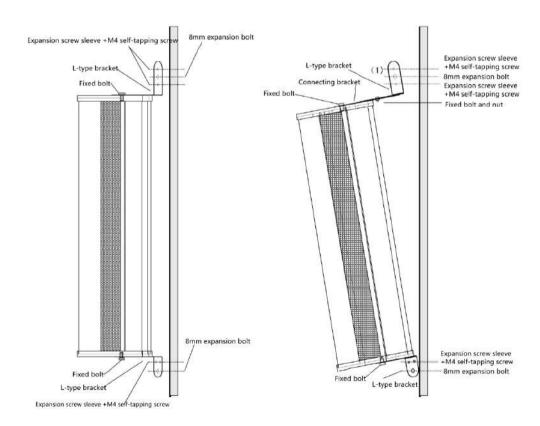





Address: No.70, Nantang Road, High-Tech Zone, Changsha, China. Mobile: +86 138 7314 3517

Email: inquiry@sponcomm.com **Tel:** +86 731 8557 0190