


MAIN FEATURES

• Outdoor waterproof column speaker, for human voice, music has the real acoustic amplification characteristics, made of aluminum alloy material, more suitable for outdoor all-day use. Such as tennis courts, swimming pools, gardens, school playgrounds, markets.

CIRCUIT DIAGRAM

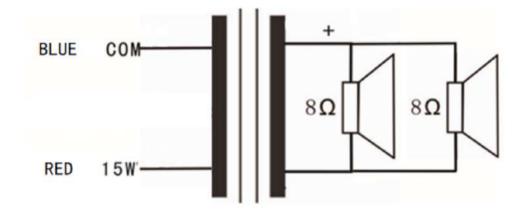

Wiring:

When wiring, the power amplifier output COM shall be connected with the blue terminal, and the power amplifier output 100V shall be connected as follows:

Using rated power 15W: the power output 100V shall be connected with red terminal.

SPECIFICATION


ELECTIRC PARAMETERS		
Speaker unit	4-inch woofer, 2.5-inch dura tweeter	
Max power rate	25W	
Rated Power(PHC)	15W	
Sensitivity(1kHz,1met er)	91dB±3dB	
Valid Frequency range(-10dB)	130-14kHz	
Rated Voltage	100V	
Terminal Color	Blue , Red	

WORK INFORMATION		
Working temperature	-25°C~+55°C	
Working humidity	-40°C~+70°C	
Relative humidity	<95%	

PRODUCT INFORMATION		
Product Size	151(L)×125(W)×370(H)mm	
Weight	2.7kg	
Installation method	Wall-mounted	
Packing size (2pcs)	400(L)×340(W)×210(H)mm	
Gross weight	8kg	

RAW METERIAL	
Mask	Aluminum alloy sprayed , black
Shell	Aluminum sprayed , champagne or silver
Cover	ABS painted, champagne or silver

DIMENSIONAL DRAWING

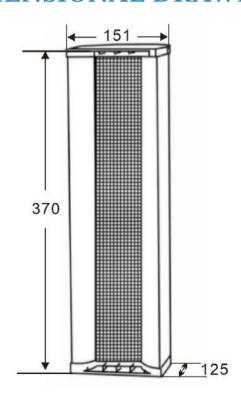


APPLICATIONS

The analog outdoor column speaker NAC-520 can be connected with constant voltage amplifier for receiving broacast or announcement from server software or IP paging mic .n



INSTALLATION DIAGRAM

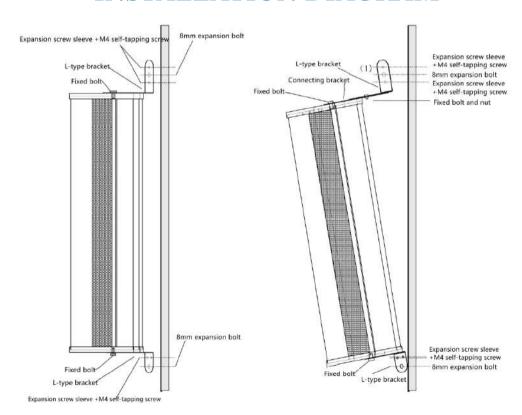





Address: No.70, Nantang Road, High-Tech Zone, Changsha, China. Mobile: +86 138 7314 3517

Email: inquiry@sponcomm.com **Tel:** +86 731 8557 0190