



## NAC-710W

### Wall Mounted Speaker

The NAC-710W is an indoor wall-mounted speaker with clear and pleasant sound quality. It is easy to install and suitable for public areas or meeting rooms.


70V/100V Fixed Voltage

Audio Amplification

## SPECIFICATION

|                        |  |
|------------------------|--|
| Frequency Response     | 110-20KHz  |
| Sensitivity            | 84dB±3dB(1m/1w)  |
| Rated Power            | 20W  |
| Power Taps             | 2.5W/5W/10W/20W(100V)<br>1.25W/2.5W/5W/10W/20W(70V)<br>20W(8Ω) |
| Line input             | 100V/70V   |
| Coverage Angle         | 115°   |
| Material               | HIPS   |
| Grill                  | Powder Coated Iron Mesh  |
| Component              | 4" Woofer+1"Silk   |
| Finished Colour        | White/Black  |
| Weight                 | 2.11kg   |
| Dimension(mm)          | 160*223*146  |
| Operatiing Temperature | -25°C~+55°C  |
| Warranty               | 2 Years  |


## CIRCUIT DIAGRAM

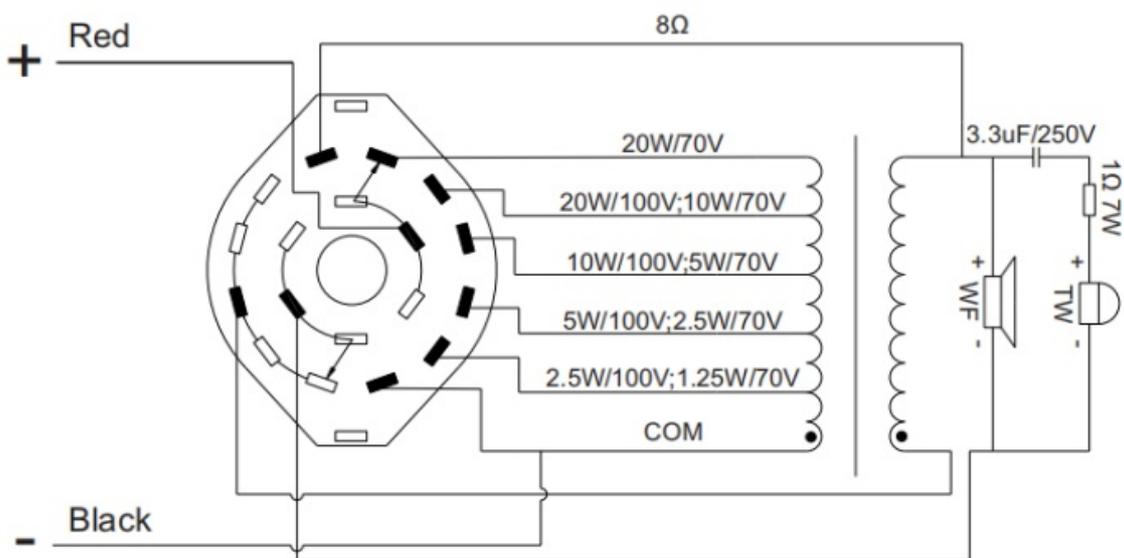

### Wiring:

- When using the rated power of 20W: set the power selector switch to the 20W position.
- When using the rated power of 10W: set the power selector switch to the 10W position.

# INSTALLATION

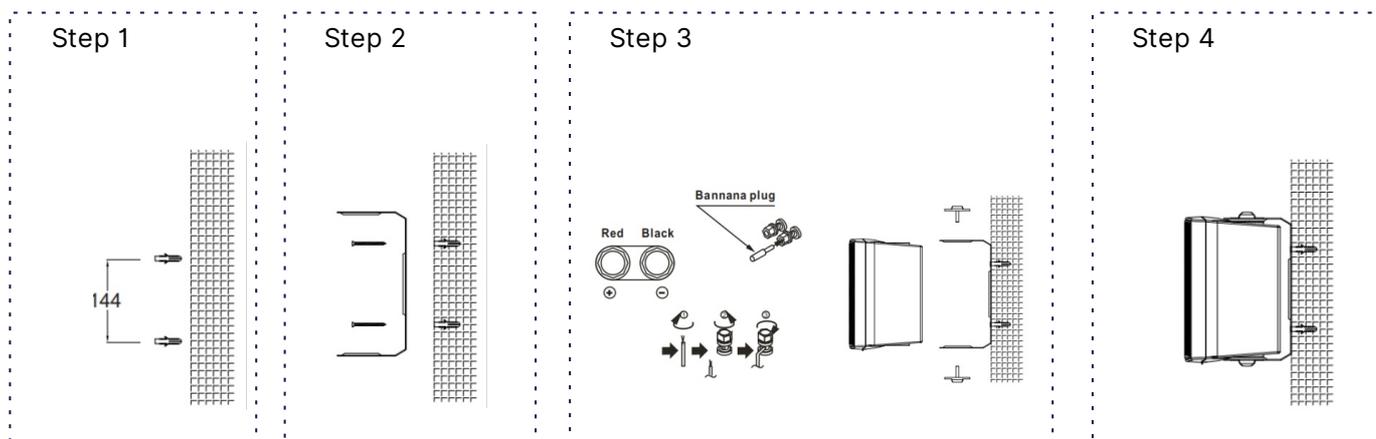

1. Start by drilling two installation holes in the wall suitable for  $\Phi 6\text{mm}$  expansion plugs, with a spacing of 144mm between the holes. Insert  $\Phi 6\text{mm}$  expansion plugs into the holes.
2. Remove the product bracket and align it with the pre-installed expansion plugs on the wall. Secure it to the wall using ST4.0 self-tapping screws.
3. Connect the audio cable and then mount the product onto the bracket.
4. Adjust the speaker to the desired angle.

unit: mm

