



NAC-730W

Wall Mounted Speaker

The NAC-730W is an indoor wall-mounted speaker with clear and pleasant sound quality. It is easy to install and suitable for public areas or meeting rooms.


70V/100V Fixed Voltage

Audio Amplification

SPECIFICATION

Frequency Response	80-20KHz
Sensitivity	88dB±3dB(1m/1w)
Rated Power	40W
Power Taps	5W/10W/20W/40W(100V) 2.5W/5W/10W/20W/40W(70V) 40W(8Ω)
Line input	100V/70V
Material	HIPS
Grill	Powder Coated Iron Mesh
Component	6.5" Woofer+1"Silk
Finished Colour	White/Black
Weight	3.34kg
Dimension(mm)	216*299*196
Operatiing Temperature	-25°C~+55°C
Warranty	2 Years


CIRCUIT DIAGRAM

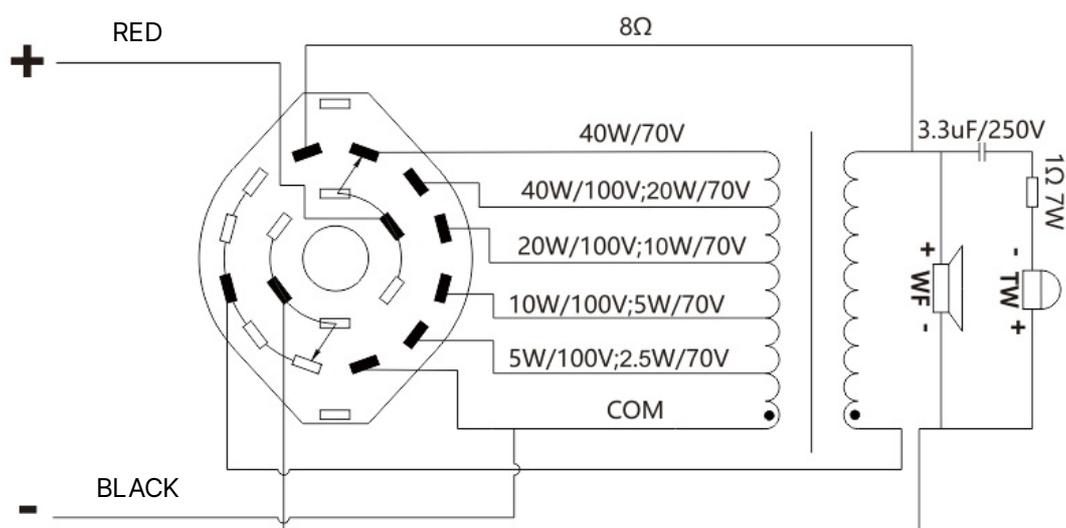

Wiring:

- When using the rated power of 40W: set the power selector switch to the 40W position.
- When using the rated power of 20W: set the power selector switch to the 20W position.

INSTALLATION

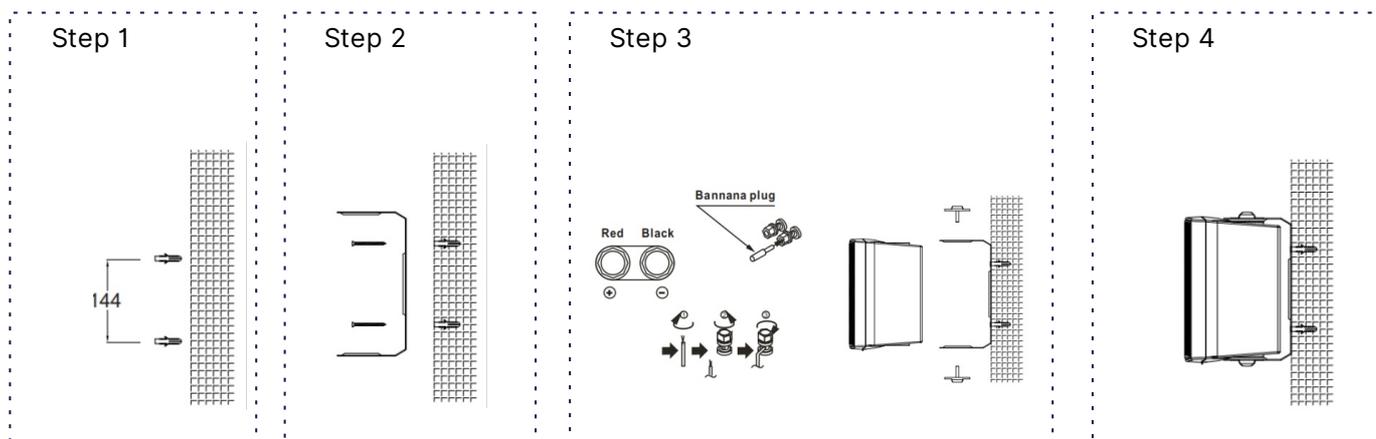

1. Start by drilling two installation holes in the wall suitable for $\Phi 6\text{mm}$ expansion plugs, with a spacing of 144mm between the holes. Insert $\Phi 6\text{mm}$ expansion plugs into the holes.
2. Remove the product bracket and align it with the pre-installed expansion plugs on the wall. Secure it to the wall using ST4.0 self-tapping screws.
3. Connect the audio cable and then mount the product onto the bracket.
4. Adjust the speaker to the desired angle.

unit: mm

