



XC-9520A



Network WM Audio Touch Panel

SPON IP Wall Mount PA Controller XC-9520A adopts standard 86 type box structure design, capacitive touch screen interface, suitable for hotel, conference room, lecture hall and other public areas.

MAIN FEATURES

Design and Display

- Compact and aesthetically pleasing structure, designed for 86 type wall box installation.
- Features a 4-inch capacitive touchscreen with 480*480 resolution.

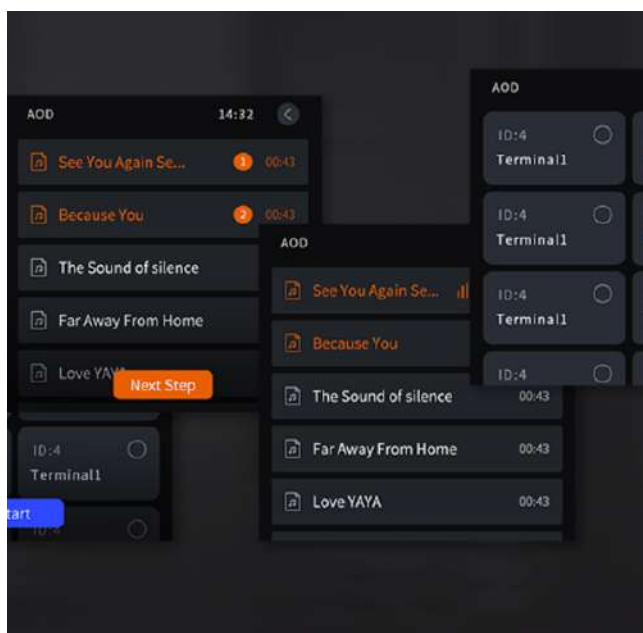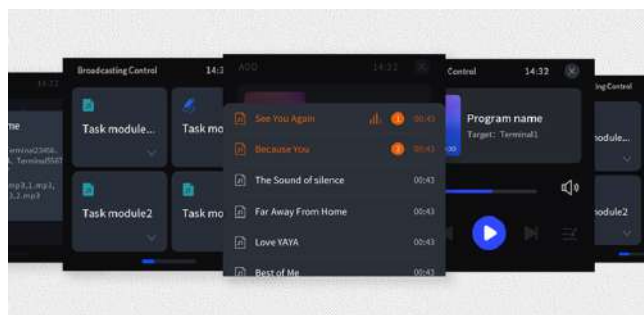

Broadcast Control & Media Support

- Remote control for task broadcasting and volume adjustment.
- Access to free AOD Mp3 files from SPON Management software XC-9000's media center.
- Capability to trigger AOD tasks on server XC-9000 manually.

Remote Access & Connectivity

- Remote volume adjustment for online terminals of the server XC-9000.
- Standard RJ45 interface, compatible with Ethernet systems and supports cross-segment and cross-router functionality.

SPECIFICATION

Power Parameters

Power Supply:	AC100~240V,50/60Hz
---------------	--------------------

Mechanical&Environment Properties

Display Screen:	4-inch capacitive touch color screen
-----------------	--------------------------------------

Resolution:	480*480
-------------	---------

Mounting Method:	86 type box
------------------	-------------

Installation Environment:	Dry Indoor Locations Only
---------------------------	---------------------------

Operating Temperature:	0°C~+40°C
------------------------	-----------

Operating Humidity:	5%~90% RH non-condensing
---------------------	--------------------------

Housing Material:	Plastic
-------------------	---------

Color:	Black
--------	-------

Product Dimensions:	86×86×37.5mm
---------------------	--------------

Product Weight:	0.21kg
-----------------	--------

Product Warranty:	2 Years Limited
-------------------	-----------------

Network Parameters

Network I/F:	10BASE-T/100BASE-TX RJ45
--------------	--------------------------

Network Protocol:	TCP/IP、UDP、ARP、ICMP、IGMP
-------------------	--------------------------

Configuration Method:	Web Interface or On device
-----------------------	----------------------------

Accessories

1×Quick Installation Guide

1×Certificate of quality and Warranty Card
--

1×Terminal(3.81-2P)

PORTS DESCRIPTION

① Built-in Microphone



② Built-in Speaker

[Front]



L2:Live wire Output


L1:Live wire
Output

L:Live wire
Input

N:Neutral wire Input

[Back]


CONNECTION DIAGRAM

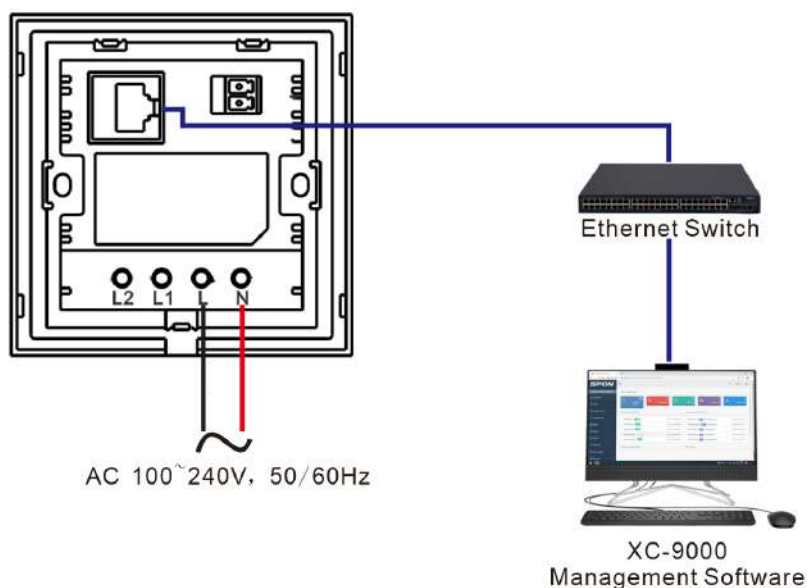

APPLICATION

Application 1

IP Wall Mount PA Controller XC-9520A support to obtain the tasks set on software XC-9000 and manually playback the tasks on the XC-9520A .During the playback , user can adjust the volume in realtime . Also it can remotely AOD mp3 files which stores on media center of software XC-9000.

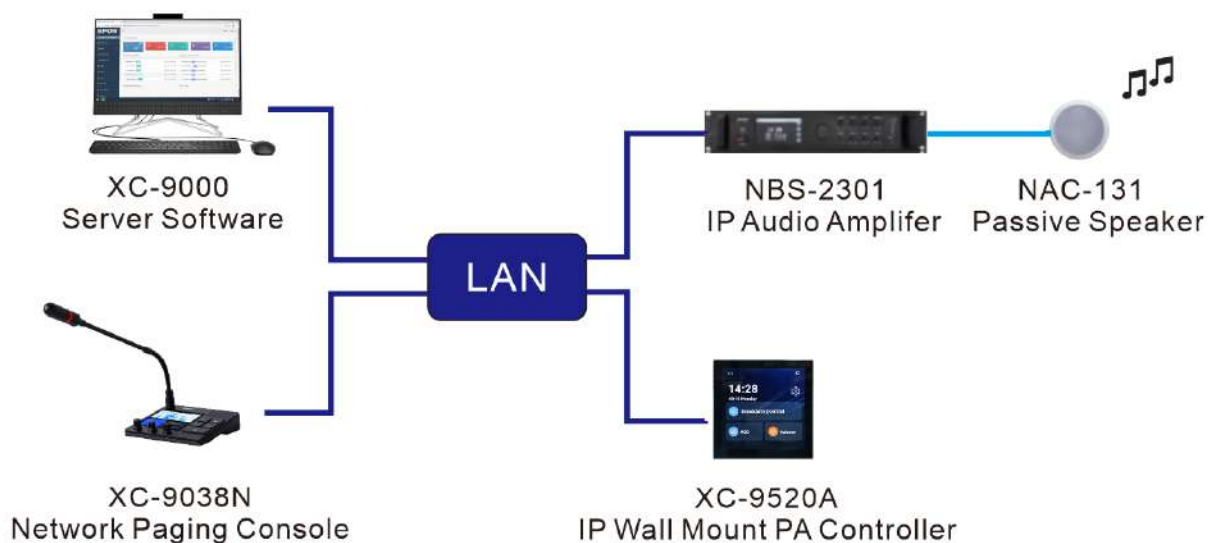

DIMENSION & INSTALLATION

■ Installation instructions

Step 1: First, separate the panel and the base at the position where the buckle is opened;

Step 2: Connect the cable to the base;

Step 3: Install the base in the 86 cassette that has been pre-installed on the wall with two 86-box matching mounting screws. Note that the arrow points up.

