



## NAC-720W

### Wall Mounted Speaker

The NAC-720W is an indoor wall-mounted speaker with clear and pleasant sound quality. It is easy to install and suitable for public areas or meeting rooms.


70V/100V Fixed Voltage

Audio Amplification

## SPECIFICATION

Frequency Response	90-20KHz
Sensitivity	86dB±3dB(1m/1w)
Rated Power	30W
Power Taps	3.5W/7.5W/15W/30W(100V) 1.9W/3.75W/7.5W/15W/30W(70V) 30W(8Ω)
Line input	100V/70V
Coverage Angle	115°
Material	HIPS
Grill	Powder Coated Iron Mesh
Component	5" Woofer+1"Silk
Finished Colour	White/Black
Weight	2.54kg
Dimension(mm)	184*249*165
Operatiing Temperature	-25°C~+55°C
Warranty	2 Years


# CIRCUIT DIAGRAM

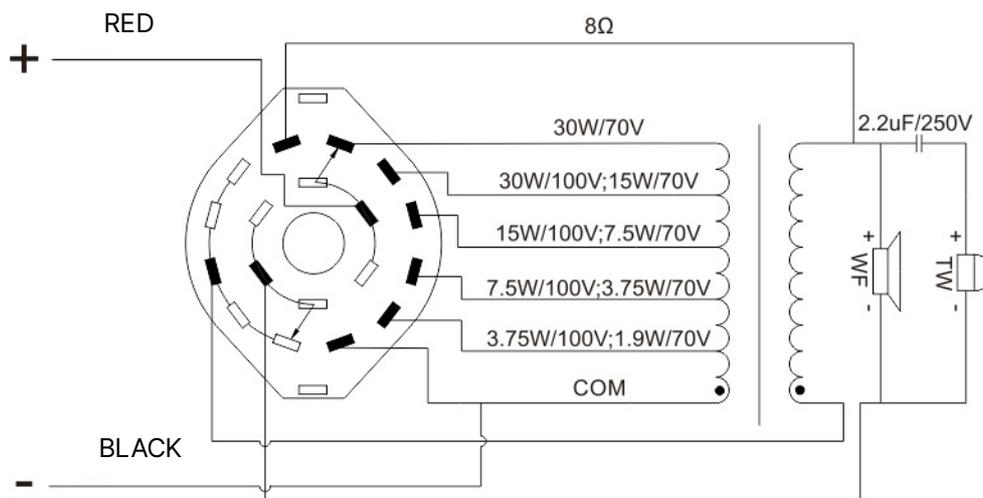

**Wiring:**

- When using the rated power of 30W: set the power selector switch to the 30W position.
- When using the rated power of 15W: set the power selector switch to the 15W position.

# INSTALLATION

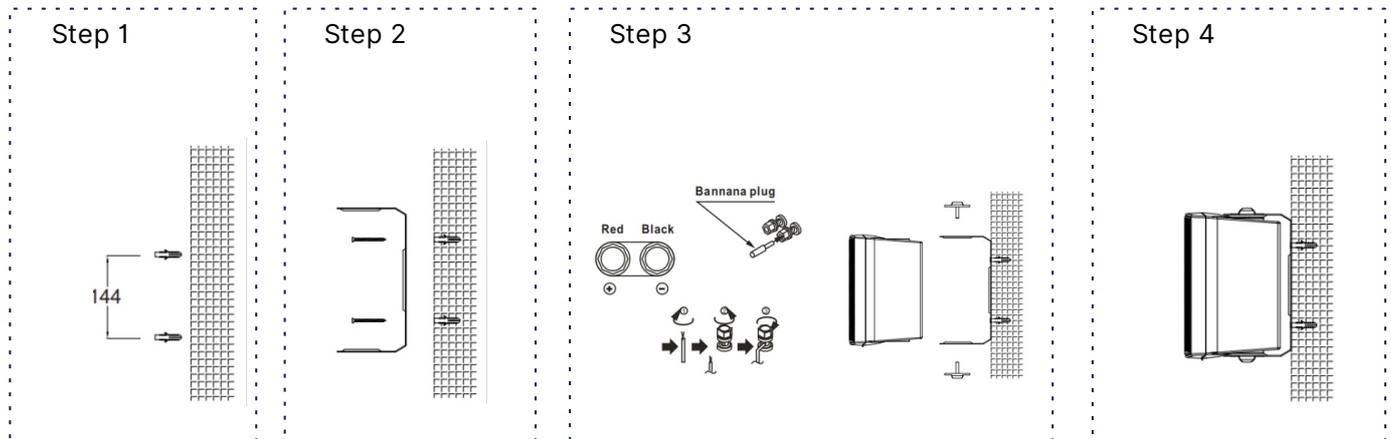

1. Start by drilling two installation holes in the wall suitable for  $\Phi 6\text{mm}$  expansion plugs, with a spacing of 144mm between the holes. Insert  $\Phi 6\text{mm}$  expansion plugs into the holes.
2. Remove the product bracket and align it with the pre-installed expansion plugs on the wall. Secure it to the wall using ST4.0 self-tapping screws.
3. Connect the audio cable and then mount the product onto the bracket.
4. Adjust the speaker to the desired angle.

unit: mm

